



PRODUCT FACT SHEET

ProTac® 1L / ProTac® 2L HIGH PERFORMANCE LITHIUM FLASHLIGHT

MARKET APPLICATIONS: Law Enforcement, Security, Emergency Medical Services, Sporting Goods, Hardware/Tool, Consumer

DESCRIPTION: Compact & powerful, the ProTac® series flashlights offer three different user selectable programs and the latest in power LED technology. The combination of small size and output from the C4® LED result in one of the brightest tactical personal carry lights for its' size. Packaged with a removable pocket clip and holster. (Models also available with AA sized cells.)

CASE MATERIAL: 6000 series machined aircraft aluminum with anodized finish. Available in Black.

DIMENSIONS: **ProTac® 1L:** Length: 3.43 in. (8.71 cm)
Head Diameter: 0.90 in. (2.29 cm)
Barrel Diameter: 0.77 in. (1.96 cm)
ProTac® 2L: Length: 4.77 in (12.12 cm)
Major Diameter: 0.90 in. (2.29 cm)
Barrel Diameter: 0.77 in. (1.96 cm)

WEIGHT: **ProTac® 1L:** 2.0 oz (57 grams) with battery* **ProTac® 2L:** 2.8 oz (79 grams) with batteries*

LENS: Glass lens, o-ring sealed.

LIGHT SOURCE: C4® LED technology, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT: See charts for specific model. Optimized electronics provides regulated intensity.

ON/OFF: Multi-function, push-button tactical tailswitch. One handed operation of momentary, variable intensity or strobe mode. TEN-TAP™ programmable switch allows user selection of one of three different programs: high/strobe/low (factory default), high only, or low/high.

RUN TIME: See charts for specific model. All claims to 10% of initial lumen output.

BATTERY: **ProTac® 1L:** One (1) 3 Volt CR123A Lithium battery. **ProTac® 2L:** Two (2) 3 Volt CR123A Lithium batteries. CR123A batteries have a shelf life of 10 years.

FEATURES:




C4® LED technology for extreme brightness.
LED Solid State Power Regulation provides maximum light output throughout battery life.
IPX7 rated design; waterproof to 1 meter for 30 minutes.
2 meter impact resistance tested.
TEN-TAP™ programmable switch allows user to select one of three different programs.
Anti-roll facecap.
Removable pocket clip.
Serialized for positive identification.

WARRANTY: Streamlight's Limited Lifetime Warranty.

APPROVALS: Meets applicable European Community directives. **CE**

OPTIONAL ACCESSORIES: Holster.

	ProTac® 1L			ProTac® 2L		
	FL1 STANDARD	HIGH	LOW	FL1 STANDARD	HIGH	LOW
OUTPUT		180 LUMENS	12 LUMENS		260 LUMENS	13 LUMENS
RUNTIME		2h	24h		3h	50h
DISTANCE		123m	32m		150m	35m
INTENSITY		3,800cd	250cd		5,600cd	300cd
	1L Strobe Runtime: 4 hours			2L Strobe Runtime: 6 hours		

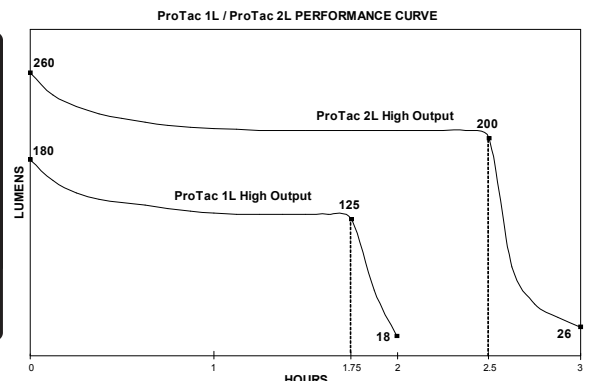

* Battery(s) included with purchase

All performance claims tested to ANSI/NEMA FL1-2009 Standard

Issued: 12/23/09

Revised: 01/11/13 Rev: 5

Made In China

Document #210