PRODUCT FACT SHEET

ProTac® HL
HIGH LUMEN LITHIUM TACTICAL FLASHLIGHT

MARKET APPLICATIONS: Law Enforcement, Security, Emergency Medical Services, Sporting Goods, Hardware/Tool, Consumer

DESCRIPTION: With 600 lumens of blinding light, the ProTac® HL is the brightest addition to the ProTac® series. The ProTac® HL offers the latest in power LED technology and three different user selectable programs. The combination of small size and output from the C4® LED result in one of the brightest tactical personal carry lights for its' size. Packaged with a removable pocket clip and holster.

CASE MATERIAL: 6000 series machined aircraft aluminum with anodized finish. Available in Black.

DIMENSIONS: Length: 5.40 in. (13.72 cm)
Head Diameter: 1.375 in. (3.49 cm)
Barrel Diameter: 1.0 in. (2.54 cm)
Tri-Lobe Diameter: 1.45 in. (3.68 cm)

WEIGHT: 5.6 oz (158 grams) with batteries

LENS: Glass lens, o-ring sealed.

LIGHT SOURCE: C4® LED technology, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT: See chart. Optimized electronics provides regulated intensity.



ON/OFF: Multi-function, push-button tactical tailswitch. One handed operation of momentary, variable intensity or strobe mode. TEN-TAP™ programmable switch allows user selection of one of three different programs: high/strobe/low (factory default), high only, or low/high.

RUN TIME:

See chart. All claims to 10% of initial lumen output. Strobe: 2.5 continuous hours.

BATTERY: Two (2) 3 Volt CR123A Lithium batteries. CR123A batteries have a shelf life of 10 years.

FEATURES:

C4® LED technology for extreme brightness.
IPX7 rated design; waterproof to 1 meter for 30 minutes.
1 meter impact resistance tested.
LED Solid State Power Regulation provides maximum light output throughout battery life.
IPX7 rated design; waterproof to 1 meter for 30 minutes.
TEN-TAP™ programmable switch allows user to select one of three different programs.
Anti-roll facecap.
Removable pocket clip.
Serialized for positive identification.

WARRANTY: Streamlight's Limited Lifetime Warranty

APPROVALS: Meets applicable European Community directives. CE

OPTIONAL ACCESSORIES: Holster

FL1 STANDARD	HIGH	LOW
OUTPUT	600 LUMENS	33 LUMENS
RUNTIME	1h 15min	18h
DISTANCE	253m	57m
INTENSITY	16,000cd	800cd

Strobe Runtime: 2.5 hours

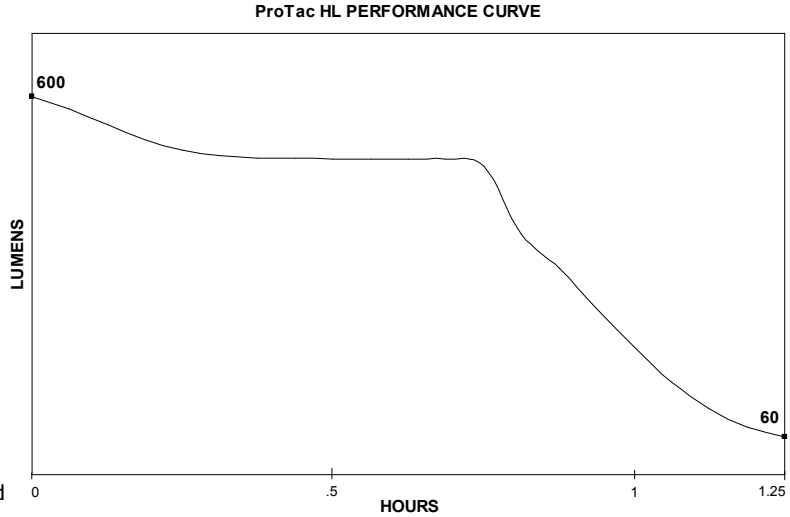

All performance claims tested to ANSI/NEMA FL1-2009 Standard
Issued: 01/06/2012
Revised: 04/16/2012 **Rev:** 1

Made In China

Document #215