

STRION® DS HPL
HIGH LUMEN LONG RANGE DUAL SWITCH RECHARGEABLE FLASHLIGHT
MARKET
APPLICATIONS: Premium Professional Light - Law Enforcement, Industrial, Security, Outdoor, Consumer

DESCRIPTION: Ultra compact & powerful, the Strion® DS HPL rechargeable flashlight offers two independent easy to locate switches, 3 microprocessor controlled variable intensity modes, strobe mode and the latest in high power LED technology. The Strion® DS HPL also offers three different user selectable programs. The combination of rechargeable batteries and high power C4® LED results in one of the lowest operating costs of any flashlight made.


CASE MATERIAL: 6000 series machined aircraft aluminum with anodized finish. Available in Black.


DIMENSIONS: Length: 7.56 in (19.20 cm) Major Diameter: 2.20 in. (5.59 cm)
 Barrel Diameter: 0.95 in. (2.41 cm)

WEIGHT: 6.9 oz (196 grams) with battery (included in purchase)

LENS: Unbreakable polycarbonate lens with scratch-resistant coating. O-ring sealed.

LIGHT SOURCE: C4® LED technology, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT: See chart. Optimized electronics provides regulated intensity.
 Deep-dish parabolic reflector produces a long range beam with optimal peripheral illumination.

ON/OFF: Multi-function, easy-access head mounted push-button switch and second multi-function push-button tactical tailswitch where both switches offer full feature control independent of each other. One handed operation of momentary, variable intensity or strobe mode using either switch. Switches designed for extremely long life; tested at 1 million actuations. TEN-TAP® programmable switch allows user selection of one of three different programs: high/medium/low with strobe (factory default), high only without strobe, or high/medium/low without strobe.

RUN TIME:  See chart. All claims to 10% of initial lumen output. Strobe: 2.5 continuous hours.


BATTERY: Lithium Ion with on-board safety control circuit, 3.75V, 2200mAh, rechargeable up to 1000 times.

CHARGING: Fits existing Strion® chargers.
 Clamp style charge holder with digital control circuit that prevents overcharge.
 Fully recharges battery in 3 hours and charges battery in product.
 Charge base LED indication: LED Steady - Charging; LED Blinking - Charged.





FEATURES: C4® LED technology for extreme brightness.
 IPX4 rated design; water resistant operation.
 2 meter impact resistance tested.
 TEN-TAP® programmable switch allows user to select one of three different programs.
 LED Charge-continuity indicator on charger base.
 Compact, snap-in charger mounts in any position.
 Serialized for positive identification.


WARRANTY: Streamlight's Limited Lifetime Warranty.

APPROVALS:  Meets applicable European Community directives.

 CEC Compliant

OPTIONAL
ACCESSORIES: Safety Wands, Holster, Rail Mount.

	FL1 STANDARD	HIGH	MEDIUM	LOW
OUTPUT	 700 LUMENS	300 LUMENS	40 LUMENS	
RUNTIME	 1h15m	3h15m	20h	
DISTANCE	 420m	268m	102m	
INTENSITY	 44,000cd	18,000cd	2,600cd	

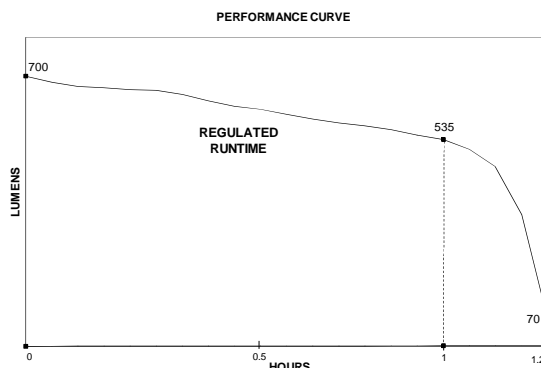

All performance claims tested to ANSI/NEMA FL1-2009 Standard

Issued: 06/22/2016

Revised: 06/28/2016 Rev: 1

Assembled In The USA.

Document #286