MILITARY DIVISION

STREAMLIGHT®

PROFESSIONAL
ILLUMINATION TOOLS

# TABLE OF CONTENTS BY PRODUCT LINE

## // PROTAC RAIL MOUNT SERIES

**NEW**

**NEW**

ProTac® Rail
Mount 1
pg. 46

ProTac® Rail
Mount 2
pg. 47

ProTac® Rail
Mount HL-X
pg. 47

ProTac® Rail
Mount HP-X Pro
pg. 48

ProTac® Rail
Mount HL-X
Pro pg. 49

ProTac® Rail
Mount HL-X
Laser pg. 50

ProTac® 2.0
Rail Mount
pg. 50

ProTac® 2.0
Rail Mount HP
pg. 51

## // WEDGE SERIES      // TL-RACKER      // SPEEDLOCKER & RECHARGEABLE BATTERIES

Wedge® XT
pg. 54

Wedge®
pg. 54

TL-Racker®
pg. 43

SpeedLocker®
pg. 36

SL-B9® Battery
Pack pg. 37

SL-B26® Battery
Pack pg. 62

SL-B50® Battery
Pack pg. 63

## // PROTAC SERIES

ProTac®
1L-1AA pg. 55

ProTac® 2.0
pg. 55

ProTac® 2L
pg. 56

ProTac HL®
pg. 56

ProTac® 2L-X
pg. 56

ProTac® 2AA-X
pg. 57

ProTac® HL-X
pg. 58

**NEW**

## // POLYTAC SERIES

ProTac® 90X
pg. 58

ProTac HL® 6
pg. 59

ProTac HL® 5-X
pg. 60

ProTac® HPL USB
pg. 61

ProTac HL® USB
pg. 61

PolyTac® X
pg. 64

## // STRION & STINGER SERIES

Strion LED HL® //
Strion® DS HL
pg. 66

Strion® LED //
Strion® DS
pg. 66

Strion® 2020
pg. 67

Stinger® 2020
pg. 69

Stinger LED HL® //
Stinger DS LED HL®
pg. 70

Stinger® LED //
Stinger DS® LED
pg. 70

Stinger®
Color-Rite®
pg. 71

## // WORK LIGHTS

Stinger
Switchblade®
pg. 74

Strion
Switchblade®
pg. 75

Syclone® Series
pg. 76

FlipMate®
pg. 77

BearTrap® 360
pg. 77

## // SIEGE SERIES

Super Siege®
pg. 78

The Siege®
pg. 79

Siege® AA
pg. 79

## // WAYPOINT, VULCAN AND PORTABLE SCENE LIGHTS

Portable Scene
Light pg. 80

Portable Scene
Light II pg. 81

Fire Vulcan® LED
pg. 81

Waypoint® 400
pg. 83

Waypoint®
pg. 83

## // SPECIALTY

Streamlight Jr.® LED
pg. 93

ClipMate® USB
pg. 95

## // SURVIVOR SERIES

Survivor®
pg. 84

Survivor® X
pg. 85

Survivor® X
USB pg. 85

**NEW**

Survivor Pivot®
pg. 86

## // HEADLAMPS

ProTac® 2.0 Headlamp
pg. 88

Bandit® Pro
pg. 89

Bandit®
pg. 89

## // VANTAGE SERIES

Vantage® 180 X
USB  pg. 90

Vantage® II
pg. 90

Vantage®
pg. 91

## // STREAM SERIES

MicroStream®
USB pg. 92

MicroStream®
pg. 92

MacroStream® USB
pg. 92

**NEW**

MegaStream® USB
pg. 93

## // STYLUS SERIES

Stylus Pro®
pg. 94

Stylus®
pg. 94

Stylus Pro® USB
Series pg. 94

## // KEY CHAIN LIGHTS

**NEW**

Nano Light® II
pg. 95

Pocket Mate® USB
pg. 95

# SIDEWINDER SERIES

## SIDEWINDER STALK®

**IP67**

Military helmet light system with flexible stalk

- Provides ultimate maneuverability, multiple mounting options, and a flexible stalk to aim the beam
- Features white, IR, red, blue, and green LEDs – all located in the head mounted on a flexible stalk – each with low, medium, high, and strobe modes along with an additional IR/IFF beacon
- A separate Identification Friend or Foe (IFF) switch lets you use both the main light and IFF when needed

Thumb Screw
to lock into ARC rail slot

White, red, green,
blue and IR LEDs

| High 100% Output - CR123A | | | | | | |
|---|---|---|---|---|---|---|
| | WHITE LED | IR LED | RED LED | BLUE LED | GREEN LED | 3535 IFF IR IED |
| LUMENS | 76 | 5.0 lmW/sr (min) radiant intensity | 9 | 8 | 20 | 5.0 lmW/sr (min) radiant intensity |
| DISTANCE | 28m | --- | 7m | 8m | 12m | --- |
| RUN TIME | 5.6 hrs | 32 hrs | 19 hrs | 13 hrs | 13 hrs | 21 hrs |

| High 100% Output - AA LITHIUM/ALKALINE | | | | | | |
|---|---|---|---|---|---|---|
| | WHITE LED | IR LED | RED LED | BLUE LED | GREEN LED | 3535 IFF IR IED |
| LUMENS | 57 | 5.0 lmW/sr (min) radiant intensity | 9 | 8 | 20 | 5.0 lmW/sr (min) radiant intensity |
| DISTANCE | 23m | --- | 7m | 8m | 12m | --- |
| RUN TIME Lithium | 6 hrs | 33 hrs | 19 hrs | 13 hrs | 13 hrs | 32 hrs |
| RUN TIME Alkaline | 3.8 hrs | 20 hrs | 10 hrs | 6 hrs | 5 hrs | 19 hrs |

| Description | Item # | COO | TAA |
|---|---|---|---|
| Sidewinder Stalk - Includes helmet clip, CR123A and AA alkaline batteries - Coyote - Mailer | 14300 | US | YES |
| Sidewinder Stalk - Includes helmet clip, CR123A and AA alkaline batteries - Black - Mailer | 14310 | US | YES |
| Sidewinder Stalk - Includes helmet clip, ARC rail mount and assembly, CR123A and AA alkaline battery - Coyote - Mailer | 14301 | US | YES |
| Sidewinder Stalk - Includes helmet clip, ARC rail mount and assembly, CR123A and AA alkaline battery - Black - Mailer | 14311 | US | YES |
| Sidewinder Stalk - Includes helmet clip, E-Mount, CR123A and AA alkaline batteries - Coyote - Mailer | 14302 | US | YES |
| Sidewinder Stalk - Includes helmet clip, CR123A and AA alkaline batteries - Coyote - Retail Box | 14306 | US | YES |
| Sidewinder Stalk - Includes arc rail mount and assembly, CR123A and AA alkaline batteries - Coyote - Retail Box | 14307 | US | YES |
| Sidewinder Stalk - Includes helmet clip, E-Mount, CR123A and AA alkaline batteries - Coyote - Retail Box | 14308 | US | YES |

| Size and Weight | Battery |
|---|---|
| 5.5" (14 cm); AA battery with Loop and Hook Adapter: 2.88 oz (81.65g) // CR123A battery with Loop and Hook Adapter: 3.2 oz (90.7g) | (1) AA alkaline or lithium or (1) CR123A lithium batteries |



Flexible stalk to aim the beam

Rotary mode selector switch (white, red, green, blue and IR)

IR/IFF beacon

Push-button switch for on/off and intensity control

IR/IFF beacon switch
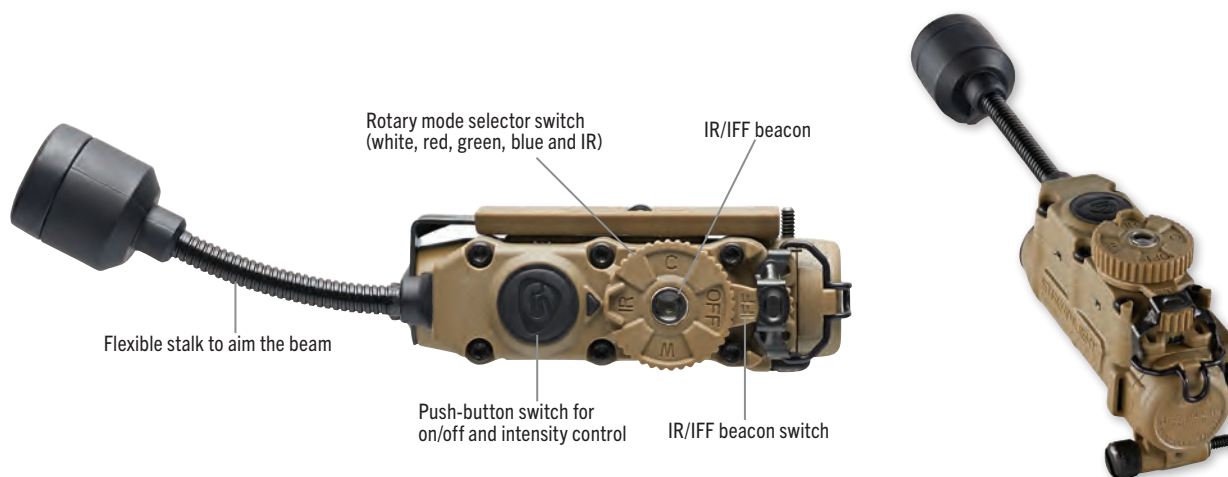


| SIDEWINDER STALK BATTERY RUN TIME | | | | |
|---|---|---|---|---|
| **CR123A LITHIUM BATTERY** | | | | |
| LED | LOW | MEDIUM | HIGH | STROBE |
| WHITE | 95 hrs | 15 hrs | 5.6 hrs | 11 hrs |
| RED | 112 hrs | 36 hrs | 19 hrs | 34 hrs |
| GREEN | 80 hrs | 27 hrs | 13 hrs | 25 hrs |
| BLUE | 80 hrs | 27 hrs | 13 hrs | 25 hrs |
| IR | 174 hrs | 57 hrs | 32 hrs | 61 hrs |
| IR W/ IFF BEACON | 150 hrs | 40 hrs | 21 hrs | 43 hrs |
| **"AA" LITHIUM / ALKALINE BATTERY** | | | | |
| WHITE | 79 hrs [lith] 66 hrs [alk] | 16 hrs [lith] 8 hrs [alk] | 6 hrs [lith] 3.8 hrs [alk] | 11 hrs [lith] 5.5 hrs [alk] |
| RED | 109 hrs [lith] 85 hrs [alk] | 36 hrs [lith] 24 hrs [alk] | 19 hrs [lith] 10 hrs [alk] | 36 hrs [lith] 25 hrs [alk] |
| GREEN | 84 hrs [lith] 55 hrs [alk] | 26 hrs [lith] 15 hrs [alk] | 13 hrs [lith] 5 hrs [alk] | 23 hrs [lith] 17 hrs [alk] |
| BLUE | 77 hrs [lith] 61 hrs [alk] | 25 hrs [lith] 16 hrs [alk] | 13 hrs [lith] 6 hrs [alk] | 25 hrs [lith] 18 hrs [alk] |
| IR | 173 hrs [lith] 145 hrs [alk] | 55 hrs [lith] 39 hrs [alk] | 33 hrs [lith] 20 hrs [alk] | 60 hrs [lith] 41 hrs [alk] |
| IR W/ IFF BEACON | 187 hrs [lith] 115 hrs [alk] | 51 hrs [lith] 38 hrs [alk] | 32 hrs [lith] 19 hrs [alk] | 47 hrs [lith] 35 hrs [alk] |

# The Sidewinder Stalk can be configured to mount on any type of combat, vehicle crew or aviation helmet system and/or MOLLE vest platform, or be directly attached to the brim of a patrol cap.

**#14303 - Sidewinder Stalk Helmet Clip**
Durable belt/clothing clip with integral helmet mount features

**#14304 - Sidewinder Stalk Arc Rail Clip**
ARC Rail™ Clip

**#14305 - Sidewinder Stalk Arc Rail Mount**
Hook and loop adapter plate

Securely attaches to MOLLE

# SIDEWINDER®

## High-impact, hands-free military light with 185° tilting head

- White, red, blue, green and IR LEDs (see specific model)
- Pull-to-turn locking rotary knob prevents accidental mode changes
- Cord attachment holes on body, capable of supporting 50 lbs. of load
- Gear clip to allow for ideal postioning of the light

|  | HIGH |
|---|---|
| LUMENS | 55 |
| CANDELA | 1,175 |
| DISTANCE | 69m |
| RUN TIME | 5.5 hrs |

| Description | Item # | COO | TAA | NSN/MSC |
|---|---|---|---|---|
| Sidewinder Military - Includes (2) AA alkaline batteries - Clam - Coyote | 14000 | US | YES | 6230-01-556-0487 |
| Sidewinder Military - Includes helmet mount and (2) AA alkaline batteries - Clam - Coyote | 14027 | US | YES | 6230-01-571-8752 |
| Sidewinder Military - Includes E-mount and (2) AA alkaline batteries - Clam - Coyote | 14031 | US | YES | -- |
| Sidewinder Aviation - Includes (2) AA alkaline batteries - Clam - Coyote | 14008 | US | YES | -- |
| Sidewinder Aviation - Includes MOLLE retainer and (2) AA alkaline batteries - Box - Coyote | 14024 | US | YES | 6230-01-527-6216 |

**\*\*Military Model:** *white, red, blue IR LEDS //* **Aviation Model:** *white, green, bue IR LEDS*

| Size and Weight | Battery |
|---|---|
| 4.65" (11.81 cm); Lithium: 4.38 oz (124g) // Alkaline: 5.02 oz (142g) | (2) AA alkaline or AA lithium for extended operation in extreme temperatures (-40°F TO +150°F) |

# SIDEWINDER® RESCUE

PM AIR WARRIOR APPROVED

## Slim, lightweight, and built for life-saving visibility with a 185° articulating head and omnidirectional diffuser

- Flashing beacon coupled with "Slide-in-Place" diffuser projects omni-directional light to signal for help
- Securely attached to MOLLE or other straps using MOLLE retainer
- Rescue Model includes white, green, blue and IR LEDs with diffuser

| Description | Item # | COO | TAA | NSN/MCN |
|---|---|---|---|---|
| Sidewinder Rescue Kit - Includes MOLLE retainer, paracord and (2) AA alkaline batteries - Box - Coyote | 14065 | US | YES | 6230-01-581-2486 |
| Sidewinder Rescue Kit - Includes MOLLE retainer, paracord and (2) AA alkaline batteries - Clam - Coyote | 14069 | US | YES | -- |
| Sidewinder Rescue - Includes (2) AA alkaline batteries - Clam - Coyote | 14067 | US | YES | -- |

| Size and Weight | Battery |
|---|---|
| 4.65" (11.81 cm); Lithium: 4.38 oz (124g) // Alkaline: 5.02 oz (142g) | (2) AA alkaline or AA lithium for extended operation in extreme temperatures (-40°F TO +150°F) |

Aluminum plate provides flat surface to adhere Velcro® for attaching to helmet

Cord attachment for paracord lanyard, which provides extra security from loss of light and allows it to be worn around the neck

# SIDEWINDER BOOT®

A durable, hands-free task flashlight used as a standard light for boot camp, recruit/basic training and wherever extra military instruction occurs

- Features a super-tough, high-impact polymer case thats durable and weather resistant
- Includes an integrated red filter that slides into place when needed

|  | HIGH | LOW |
|---|---|---|
| LUMENS | 55 | 7 |
| CANDELA | 1000 | 140 |
| DISTANCE | 83m | 24m |
| RUN TIME | 8 hrs | 90 hrs |

"Slide-in-Place" Red Filter

Durable belt/clothing clip with integrated helmet mount features

Battery polarity indicator for easy replacement in the dark

| Description | Item # |
|---|---|
| Sidewinder Boot - Includes (2) AA alkaline batteries - Coyote | 14000 |

| Size and Weight | Battery |
|---|---|
| 1.86" (4.72 cm); Lithium: 2.88 oz (82g) // Alkaline: 3.52 oz (100g) | (2) AA alkaline or AA lithium |

# SIDEWINDER COMPACT® II

Handheld, mounted, or clipped—this ultra-flexible 185° tilting light adapts to any mission and runs on multiple battery types

- White, red, blue, green and IR LEDs (see specific model)
- Fits in the palm of your hand or clips to MOLLE vest, belt, hat or pocket
- Cord attachment holes on body, capable of supporting 50 lbs. of load
- Meets MIL-STD-810F, METHOD 512.4

Sidewinder Compact II Rescue Model

"Slide-in-Place" diffuser

|  | HIGH CR123A | HIGH LITHIUM | HIGH ALKALINE |
|---|---|---|---|
| LUMENS | 55 | 47 | 47 |
| CANDELA | 1,175 | 1,000 | 1,000 |
| DISTANCE | 69m | 63m | 63m |
| RUN TIME | 6 hrs | 6 hrs | 2 hrs |

| Description | Item # | COO | TAA | NSN/MSC |
|---|---|---|---|---|
| Sidewinder Compact II Military - Includes helmet mount, headstrap and (1) CR123A lithium battery - Clam - Coyote | 14512 | US | YES | -- |
| Sidewinder Compact II Military - Includes E-mount, headstrap and (1) CR123A lithium battery - Box - Coyote | 14513 | US | YES | 6230-01-613-4312 |
| Sidewinder Compact II Military - Includes NVG mount (works w/ DoD, NATO and ISAF combat helmets) and CR123A battery - Box - Coyote | 14515 | US | YES | -- |
| Sidewinder Compact II Aviation - Includes rail mount, headstrap and (1) CR123A lithium battery - Clam - Coyote | 14531 | US | YES | -- |
| Sidewinder Compact II Aviation - Includes NVG mount (works with HGU-84 rotary wing aircrew helmet) and AA alkaline battery - Box - Coyote | 14024 | US | YES | 6230-01-626-6789 |
| Sidewinder Compact II Rescue - Includes (1) AA alkaline and CR123A battery - Box - Coyote | 14534 | US | YES | -- |

**\*\*Military Model:** white, red, blue IR LEDS // **Aviation Model:** white, green, bue IR LEDS // **Rescue Model:** white green, blue LEDS with diffuser*

| Size and Weight | Battery |
|---|---|
| 3" (7.62 cm); 2.4 oz (68g) // 3.3 oz (94g) with helmet mount | (1) CR123A lithium, or (1) AA alkaline, or (1) AA lithium battery |

# SIDEWINDER® X

**IPX7**

High-output, multi-fuel right-angle light with 185° tilt, gear clip, and multi-color LEDs for any mission

- White, red, blue, green and IR LEDs (see specific model)
- Pull-to-turn locking rotary knob prevents accidental mode changes
- Cord attachment holes on body, capable of supporting 50 lbs. of load
- Fits existing Sidewinder helmet mounts and adapters

|  | HIGH | MEDIUM 2 | MEDIUM 2 | LOW |
|---|---|---|---|---|
| LUMENS | 275 | 80 | 35 | 5 |
| CANDELA | 3,200 | 900 | 400 | 50 |
| DISTANCE | 113m | 60m | 40m | 14m |
| RUN TIME Alkaline | 4.75 hrs | 13 hrs | 30 hrs | 150+ hrs |
| RUN TIME CR123A | 2.75 hrs | 8 hrs | 19 hrs | 100+ hrs |

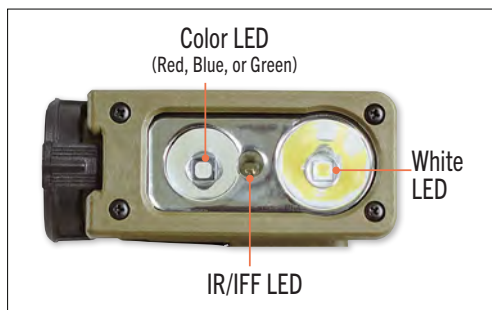Strobe runs 10.5 hours (AA) // 5.75 hours (CR123A)

Push button on/off switch and rotary selector knob

Gear clip with integrated helmet mount features

**MILITARY MODEL**

**AVIATION MODEL**

**USER CONFIGURABLE MODEL**

(user chooses between red, green, or blue)

Color LED
(Red, Blue, or Green)

White LED

IR/IFF LED

Multiple mounting options for your helmet

Sidewinder®
High Offset ARC Mount

| Description | Item # | COO | TAA |
|---|---|---|---|
| Sidewinder X UC (User Configurable) Model - Includes (2) AA alkaline batteries - Coyote | 14803 | US | YES |
| Sidewinder X Military Model - White, Red, Blue, IR LEDs - Includes E-Mount and (2) AA alkaline batteries - Coyote | 14800 | US | YES |
| Sidewinder X Military Model - White, Red, Blue, IR LEDs - Includes (2) AA alkaline batteries - Coyote | 14801 | US | YES |
| Sidewinder X Aviation Model - White, Green, Blue, IR LEDs - Includes MOLLE retainer and (2) AA alkaline batteries - Coyote | 14802 | US | YES |

| IR & Color LEDs | | | | |
|---|---|---|---|---|
|  |  | IR | RED | BLUE | GREEN |
| **HIGH MODE** | LUMENS | 12mW | 6.5 | 2.0 | 8.0 |
| | CANDELA | --- | 40 | 12 | 83 |
| | DISTANCE | --- | 13m | 7m | 18m |
| | RUN TIME Alkaline | 40 hrs | 50 hrs | | |
| | RUN TIME CR123A | 20 hrs | 30 hrs | | |
| **LOWER MODE RUN TIMES** | MED 2 [60%] | 130 hrs (AA) 65 hrs (CR123A) | 100 hrs (AA) // 70 hrs (CR123A) | | |
| | MED 1 [25%] | 330 (AA) 170 hrs (CR123A) | 250 hrs (AA) // 150 hrs (CR123A) | | |
| | LOW [5%] | 600+ hrs (AA) 300+ hrs (CR123A) | 300+ hrs (AA) // 200+ hrs (CR123A) | | |
| | STROBE | 100+ hrs (AA) // 50+ hrs (CR123A) | | | |

| Size and Weight | Battery |
|---|---|
| 2.4" (11.7 cm); CR123A: 3.3 oz. (96.6g) // AA: 4.4 oz. (124.7g) | (2) AA alkaline batteries or (1) CR123A lithium for extended operation in extreme temps (-40°F to 150°F) |

| DESCRIPTION | ITEM # | SIDEWINDER X | SIDEWINDER | SIDEWINDER COMPACT II | SIDEWINDER STALK | SIDEWINDER BOOT |
|---|---|---|---|---|---|---|
| Helmet Clip - Black | 14303 | | | | √ | |
| ARC Rail Clip - Coyote | 14304 | | | | √ | |
| Hook and Loop Adapter Plate - Coyote | 14305 | | | | √ | |
| Helmet Mount - Coyote | 14055 | √ | √ | √ | √ | √ |
| Rail Mount for Helmet - Coyote | 14057 | √ | √ | √ | √ | √ |
| Hook and Loop Mount | 14073 | √ | √ | √ | √ | √ |
| Contour Arc Rail Mount | 14114 | √ | √ | √ | √ | √ |
| Sidewinder® High Offset ARC Mount | 14115 | √ | | | | |
| Night Vision Goggle Mount - Tactical (works with DoD, NATO, & ISAF combat helmets) | 14155 | √ | √ | √ | √ | √ |
| Night Vision Goggle Mount - Aviation (works with HGU-84 rotary wing aircrew helmets) | 14135 | √ | √ | √ | √ | √ |
| Safety Wand - Glow in the Dark | 14902 | √ | √ | √ | | |
| Elastic Headstrap | 14059 | √ | √ | √ | | √ |
| E-Mount (ACH, ECH, MICH, LWH compatible) | 14136 | √ | √ | √ | √ | √ |
| E-Mount - Includes E-Mount, MOLLE retainer and paracord | 14137 | √ | √ | √ | | √ |
| Paracord | 14138 | √ | √ | √ | | √ |
| Sidewinder Rescue Kit - Includes MOLLE retainer and paracord | 14139 | √ | √ | √ | | √ |
| Helmet Mount Kit - Includes helmet mount, headstrap, and MOLLE plate | 14112 | √ | √ | √ | | √ |
| Rail Mount Kit - Includes rail mount, headstrap and MOLLE plate | 14113 | √ | √ | √ | | √ |
| MOLLE Retainer Replacement | 14030 | √ | √ | | | |
| CR123A Batteries (2 pack) | 85175 | √ | √ | √ | √ | |
| CR123A Batteries (6 pack) | 85180 | √ | √ | √ | √ | |
| CR123A Batteries (12 pack) | 85177 | √ | √ | √ | √ | |
| CR123A Batteries (400 pack) | 85179 | √ | √ | √ | √ | |

14303

14304

14305

14055

14057

14073

14114

14155

14135

14902

14059

14136

14137

14138

14139

14112

14113

14030

14115

85175, 85180, 85177, 85179

# LIGHT ONLY

## COMPACT & FULL FRAME PISTOLS
### UNIVERSAL RAIL MOUNT MODELS

TLR-1 HL®

**NEW**
TLR-1 HL®-X

TLR-1®
TLR-1®s

TLR-3®

TLR-7® X

TLR-7® X
CONTOUR REMOTE

TLR-7® HL-X USB

TLR-9®

## SUBCOMPACT & COMPACT PISTOLS
### TRIGGER GUARD & RAIL MOUNT MODELS

TLR-6®
NON-LASER

TLR-7® X

TLR-7® HL-X USB

TLR-7® X SUB

**NEW**
TLR-7® HL-X SUB

## LONG GUN/AR
### SHOTGUN FOREND & RAIL MOUNT MODELS

TL-RACKER®

TLR® RM 1

**NEW**
TLR® RM 1 HL-X

TLR® RM 2

PROTAC®
RAIL MOUNT 1

PROTAC®
RAIL MOUNT 2

PROTAC® RAIL
MOUNT HL-X

PROTAC® RAIL
MOUNT HL-X PRO

**NEW**
PROTAC® RAIL
MOUNT HP-X PRO

PROTAC® 2.0
RAIL MOUNT

**NEW**
PROTAC® 2.0
RAIL MOUNT HP

TLR-1 HL®
(Long Gun Kit)

TLR-1 HPL®
(Long Gun Kit)

# LIGHT/LASER COMBO

## COMPACT & FULL FRAME PISTOLS
### UNIVERSAL RAIL MOUNT MODELS

| TLR-2® // TLR-2®s | TLR-2 HL® | TLR-2® G // TLR-2 HL® G | TLR-8® X *(NEW)* | TLR-8® X G *(NEW)* | TLR-10® // TLR-10® G |

## SUBCOMPACT & COMPACT PISTOLS
### TRIGGER GUARD & RAIL MOUNT MODELS

| TLR-4® // TLR-4® G | TLR-6® | TLR-6 HL® // TLR-6 HL® G | TLR-8® X // TLR-8® X G *(NEW)* | TLR-8® X SUB // TLR-8® X G SUB *(NEW)* | TLR-8® HL-X // TLR-8® HL-X G *(NEW)* | TLR-8® HL-X SUB // TLR-8® HL-X G SUB *(NEW)* |

## LONG GUN/AR
### RAIL MOUNT MODELS

| TLR-2® // TLR-2®s | TLR-2 HL® | TLR-2 HL® G | TLR® RM 1 LASER RED//GREEN | TLR® RM 2 LASER RED//GREEN | PROTAC® RAIL MOUNT HL-X LASER |

## SPECIALTY/IR
### LONG GUN/AR & FULL FRAME PISTOLS

TLR-VIR® II

It can be difficult to choose the right weapon-mounted light for your specific gun and application. We want to make the process easier. That's why we designed the TLR Fit Guide to make it easy for you to select the right light for your weapon.

**SCAN OR CLICK THE QR CODE TO VIEW OUR TLR FIT GUIDE**

## Beam Patterns Explained

Choosing the best gun light means pairing the right beam with your needs. Streamlight's range of gun lights offers Traditional, High Lumen, and High Candela options, each designed with features tailored to different tactical applications. Whether you need wide area visibility, a powerful pinpoint beam, or a mix of both, Streamlight has a solution to keep you ready for any challenge.



**TRADITIONAL** BEAM PATTERN     **HIGH LUMEN** BEAM PATTERN     **HIGH CANDELA** BEAM PATTERN

**Traditional Beam Pattern:** Designed for versatile, multi-purpose use, these lights offer exceptional value across a wide range of lighting needs.

| Performance Characteristics | Traditional Product | |
|---|---|---|
| • Optimal balance of candela and lumens - the beam pattern most people expect out of a quality flashlight<br>• Very good all-around use, broadest range of lighting applications<br>• Good focus and arc/periphery light<br>• Longest regulated run times | • TLR-1® and TLR-1® s<br>• TLR-2® and TLR-2® s<br>• TLR-3®<br>• TLR-4®<br>• TLR-6® | • TLR-7® X Series<br>• TLR-8® X Series<br>• TLR-9®<br>• TLR-10® Series<br>• ProTac® Rail Mount 1<br>• ProTac® Rail Mount 2 |

**High Lumen Beam Pattern:** Delivers maximum brightness with a wide beam pattern, ensuring full situational awareness. Perfect for illuminating smaller spaces where intense light is essential without requiring long-range reach.

| Performance Characteristics | High Lumen Product | |
|---|---|---|
| • High lumen beam<br>• Maximum illumination - a broader beam pattern with a wider center spot<br>• Shorter regulated run time<br>• More glare/bounce back | • TLR-1 HL®<br>• TLR-1 HL®-X<br>• TLR-2 HL® Series<br>• TLR-6 HL® Series | • ProTac® Rail Mount HL-X Series<br>• ProTac® 2.0 Rail Mount |

**High Candela Beam Pattern:** Delivers powerful, long-distance beams with high-lumen output - perfect for down-range applications requiring precision and clarity.

| Performance Characteristics | High Candela Product | |
|---|---|---|
| • High-candela beam<br>• Casts a wide, bright beam with a tight, focused center spot for greater down-range light<br>• More light on your target at a distance | • TLR-1 HPL®<br>• TLR-7® HL-X Series<br>• TLR-8® HL-X Series | • TLR® RM 1 Series<br>• TLR® RM 2 Series<br>• ProTac® 2.0 Rail Mount HP<br>• ProTac® Rail Mount HP-X Pro |

# TLR SERIES

## TLR-1 HL®

**WHITE LIGHT ILLUMINATOR**

**IPX7**

Provides for maximum illumination with a wide beam pattern that lights up large areas so you can identify what is nearby

- Wide peripheral beam
- Strobe for signaling
- Unbreakable, scratch-resistant, gasket sealed lens

**1000 LUMENS**

| LUMENS | 1,000 |
|---|---|
| CANDELA | 20,000 |
| DISTANCE | 283m |
| RUN TIME | 1.5 hrs |

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR-1 HL - Includes rail locating keys for use with GLOCK® style, 1913 Picatinny, S&W 99/TSW, SIG P320 and Beretta® 90-TWO - lithium batteries – Black | 69260 | US | YES |
| TLR-1 HL - Includes rail locating keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/TSW, SIG SAUER P320® and Beretta® 90-TWO and lithium batteries – Flat Dark Earth | 69266 | US | YES |
| TLR-1 HL - Includes rail locating keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/TSW, SIG SAUER P320® and Beretta® 90-TWO and lithium batteries – Flat Dark Earth Brown | 69267 | US | YES |
| TLR-1 HL - Long Gun Kit - Includes safe off remote door switch, remote pressure switch, mounting clips, standard door switch – lithium batteries - Box – Black | 69262 | US | YES |
| TLR-1 HL - Long Gun Kit Includes safe off remote door switch, remote pressure switch, mounting clips, standard door switch and lithium batteries – Flat Dark Earth | 69888 | US | YES |
| TLR-1 HL - Dual Remote Kit Includes dual remote pressure switch, "safe off" door switch, mounting clips and lithium batteries – Black | 69889 | US | YES |

TLR-1 HL Long Gun Kit

TLR-1 HL Dual Remote Kit

| Size and Weight | Battery |
|---|---|
| 3.39" (8.61 cm); 4.32 oz (122.5g) | (2) CR123A lithium |

# TLR-1 HL®-X

## THE TLR-1 HL
## GOES RECHARGEABLE

**NEW**

## TLR-1 HL®-X

**WHITE LIGHT ILLUMINATOR**

**IPX7**

Blinding peripheral beam, quick-access, front-loading battery compartment for rapid battery replacement without removing the light from the firearm

- Wide peripheral beam pattern gives you a powerful 1,500 lumen light
- Extended high and high rear paddle switches to suit your shooting style
- Rapid battery replacement without removing the light from your firearm
- Recharges in 2.5 hours

**1500 LUMENS**

|  | SL-B9 | CR123A |
|---|---|---|
| **LUMENS** | 1,500 | 1,000 |
| **CANDELA** | 20,000 | 15,000 |
| **DISTANCE** | 283m | 245m |
| **RUN TIME** | 1 hr | 1.5 hrs |

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR-1 HL-X - Includes rail locating keys for use with GLOCK® style, 1913 Picatinny, S&W 99/TSW, Sig P320 and Beretta® 90-TWO and CR123A lithium batteries - Black | 69500 | US | YES |
| TLR-1 HL-X USB - Includes rail locating keys, (2) SL-B9 battery packs and USB-C cord - Black | 69501 | US | YES |

| Size and Weight | Battery |
|---|---|
| 3.45" (8.76 cm); SL-B9: 5.19 oz (147g) // CR123A: 4.94 oz (140g) | (2) SL-B9 battery packs or (2) CR123A lithium |

No need to remove from gun to replace the batteries

# TLR-1® // TLR-1®s

**WHITE LIGHT ILLUMINATOR**

**IPX7**

Durable gun light that produces a concentrated beam with optimum peripheral illumination

• Available in standard or strobe
• Mounts directly to handguns with GLOCK® style rails and all MID-STD-1913 (picanny) rails

| | |
|---|---|
| **LUMENS** | 300 |
| **CANDELA** | 12,000 |
| **DISTANCE** | 219m |
| **RUN TIME** | 2.5 hrs |

| Description | Item # |
|---|---|
| TLR-1 – Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, S&W 99/TSW, SIG P320 and Beretta® 90TWO and lithium batteries - Black | 69110 |
| TLR-1s – Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, S&W 99/TSW, SIG P320 and Beretta® 90TWO and lithium batteries - Black | 69210 |

| Size and Weight | Battery |
|---|---|
| 3.39" (8.61 cm); 4.18 oz (118.6g) | (2) CR123A lithium |

## TLR-2 HL®

**IPX4**

WHITE LIGHT ILLUMINATOR / RED LASER

### Super bright, 1000 lumen gun light with red aiming laser

- Wide peripheral beam featuring a 640-660nm red laser
- Unbreakable, scratch-resistant, gasket sealed lens
- Easy, fast battery installation/replacement

**1000 LUMENS**

| LUMENS | 1,000 |
|---|---|
| CANDELA | 20,000 |
| DISTANCE | 283m |
| RUN TIME | 1.5 hrs |

Laser mode runs 45 hours

| Description | Item # | COO | TAA | NSN/MCN |
|---|---|---|---|---|
| TLR-2 HL - Includes rail locating keys for use with GLOCK® style, 1913 Picatinny, S&W 99 TSW, SIG P320 and Beretta® 90TWO and lithium batteries - Black | 69261 | US | YES | 6920-01-661-9705 |

| Size and Weight | Battery |
|---|---|
| 3.39" (8.61 cm); 4.88 oz (138.4g) | (2) CR123A lithium |

## TLR-2 HL® G

**IPX4**

WHITE LIGHT ILLUMINATOR / GREEN LASER

### Super bright, 1000-lumen gun light with green aiming laser

- Wide peripheral beam featuring a 510-530nm green laser
- Unbreakable, scratch-resistant, gasket sealed lens
- Easy, fast battery installation/replacement

**1000 LUMENS**

| LUMENS | 1,000 |
|---|---|
| CANDELA | 20,000 |
| DISTANCE | 283m |
| RUN TIME | 1.5 hrs |

Laser mode runs 17 hours

| Description | Item # | COO | TAA | NSN/MCN |
|---|---|---|---|---|
| TLR-2 HL G - Includes rail locating keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/TSW, SIG SAUER P320® and Beretta® 90-TWO and lithium batteries - Black | 69265 | US | YES | 6230-01-659-3699 |

| Size and Weight | Battery |
|---|---|
| 3.39" (8.61 cm); 4.88 oz (138.4g) | (2) CR123A lithium |

# TLR-2® // TLR-2®s

**WHITE LIGHT ILLUMINATOR / RED LASER**

IPX4

Durable gun light with integrated red laser securely fits a broad range of weapons

- Wide peripheral beam featuring a 650-660nm red laser
- Mounts directly to handguns with GLOCK® style rails and to all MIL-STD-1913 (Picatinny) rails

| LUMENS | 300 |
|---|---|
| CANDELA | 12,000 |
| DISTANCE | 219m |
| RUN TIME | 2.5 hrs |

Laser mode runs 48 hours

| Description | Item # | COO | TAA | NSN/MCN |
|---|---|---|---|---|
| TLR-2 – Includes rail locating keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/TSW, SIG SAUER P320® and Beretta® 90-TWO and lithium batteries - Black | 69120 | US | YES | 6230-01-544-1663 |
| TLR-2s – Includes rail locating keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/TSW, SIG SAUER P320® and Beretta® 90-TWO and lithium batteries - Black | 69230 | US | YES | 6230-01-601-5128 |

| Size and Weight | Battery |
|---|---|
| 3.39" (8.61 cm); 4.72 oz (133.8g) | (2) CR123A lithium |

# TLR-2® G

**WHITE LIGHT ILLUMINATOR / GREEN LASER**

IPX4

Durable gun light with integrated green laser that can be seen even in daylight

- Highly visible beam featuring a 510-530nm green laser
- Stobe light with option to be disabled
- Mounts directly to handguns with GLOCK® style rails and all MIL-STD-1913 (Picanny) rails

| LUMENS | 300 |
|---|---|
| CANDELA | 12,000 |
| DISTANCE | 283m |
| RUN TIME | 2.5 hrs |

Laser mode: runs 17 hours

| Description | Item # | COO | TAA | NSN/MCN |
|---|---|---|---|---|
| TLR-2 G - Includes rail locating keys for use with GLOCK® style, 1913 Picatinny, S&W 99 TSW, SIG P320 and Beretta® 90TWO and lithium batteries - Black | 69250 | US | YES | 1005-01-633-4225 |

| Size and Weight | Battery |
|---|---|
| 3.39" (8.61 cm); 4.72 oz (133.8g) | (2) CR123A lithium |

## TLR-3®

**WHITE LIGHT ILLUMINATOR**

**IPX7**

Lightweight gun light designed for sub-compact and compact weapons

- Rail clamp designed to rapidly attach/detach from side of weapon; one-handed snap-on & tighten interface keeps hands away from muzzle
- Impact-resistant polymer construction with durable anodized aluminum facecap
- Operates in extreme temperatures

**1000 LUMENS**

| LUMENS | 170 |
|---|---|
| CANDELA | 3,300 |
| DISTANCE | 115m |
| RUN TIME | 1.5 hrs |

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR-3 - Includes rail locating keys and (2) CR2 lithium batteries - Black | 69220 | US | YES |
| TLR-3 H&K USP Compact - Includes (2) CR2 lithium batteries - Black | 69221 | US | YES |
| TLR-3 H&K USP Full-Size - Includes (2) CR2 lithium batteries - Black | 69222 | US | YES |

| Size and Weight | Battery |
|---|---|
| 2.71" (6.88 cm); 2.32 oz (65.8g) | (2) CR2 lithium |

## TLR-4®

**WHITE LIGHT ILLUMINATOR / RED LASER**

**IPX4**

Lightweight rail-mounted light with red laser, constructed of an impact-resistant polymer, designed to fit compact and sub-compact handguns

- Features 640-660nm red laser
- Ambidextrous momentary/constant on operation
- Models also available for H&K USP compact frame and H&K USP full size frame

| LUMENS | 170 |
|---|---|
| CANDELA | 3,300 |
| DISTANCE | 115m |
| RUN TIME | 1.5 hrs |

Laser mode runs 15 hours

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR-4 - Includes rail locating keys and CR2 lithium battery - Black | 69240 | US | YES |
| TLR-4 - H&K USP Compact - Includes CR2 lithium battery - Black | 69241 | US | YES |
| TLR-4 - H&K USP Full-Size - Includes CR2 lithium battery - Black | 69242 | US | YES |

| Size and Weight | Battery |
|---|---|
| 2.73" (6.93 cm); 2.81 oz (79.7g) | (1) CR2 lithium |

## TLR-4® G

**WHITE LIGHT ILLUMINATOR / GREEN LASER**

**IPX4**

Designed for subcompact and compact weapons, this rail-mounted light features an integrated green laser for high visibility long-range targeting, even in daylight

- Features 510-530nm green laser
- Ambidextrous momentary/constant on operation
- Models also available for H&K USP compact frame and H&K USP full size frame

| LUMENS | 160 |
|---|---|
| CANDELA | 3,200 |
| DISTANCE | 113m |
| RUN TIME LED | 1.75 hrs |
| RUN TIME LED+ LASER | 1.25 hrs |

Laser mode runs 4 hours

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR-4 G - Includes rail locating keys for use with Picatinny or GLOCK® style rails and CR2 lithium battery - Black | 69245 | US | YES |
| TLR-4 G H&K USP Compact - Includes CR2 lithium battery - Black | 69246 | US | YES |
| TLR-4 G H&K USP Full-Size - Includes CR2 lithium battery - Black | 69247 | US | YES |

| Size and Weight | Battery |
|---|---|
| 2.73" (6.93 cm); 2.81 oz (79.7g) | (1) CR2 lithium |

# TLR-VIR® II

**WHITE LIGHT/ IR/ IR LASER COMBO ILLUMINATOR**

**IPX7**

## White LED weapon light with infrared LED and laser options

- Two lighting modes available
- IR requires night vision goggles
- Windage and Elevation adjustment screws with tactile indication
- Securely fits M17/M18 pistols and all long guns with MIL-STD-1913 rails

| | |
|---|---|
| LUMENS | 300 |
| CANDELA | 5000 |
| DISTANCE | 600mW/sr |
| VISIBLE RUN TIME | 1.5 hrs |
| IR RUN TIME | 12 hrs |

Laser mode runs 4 hours

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR-VIR II - Visible LED/IR Illuminator/IR Laser - Includes rail locating keys and CR123A lithium battery - Coyote | 69191 | US | YES |
| TLR-VIR II - Visible LED/IR Illuminator/IR Laser - Includes rail locating keys and CR123A lithium battery - Black | 69192 | US | YES |

| Size and Weight | Battery |
|---|---|
| 3.3" (8.39 cm); 3.82 oz (108g) | (1) CR123A lithium |

# TLR-6®

**IPX4**

Designed to securely attach to a variety of subcompact handguns; features 640-660nm red laser

- Tool-less battery replacement without removal from the weapon or the need to re-sight the laser
- Ambidextrous push-button switches on either side for easy operation
- Designed to securely attach to the trigger guard on hand guns
- Models available without laser

| | |
|---|---|
| LUMENS | 100 |
| CANDELA | 2,000 |
| DISTANCE | 89m |
| RUN TIME | 1 hr |

Laser mode run 11 hours

| Description | Item # |
|---|---|
| TLR-6 (GLOCK® 42/43) White LED and Red Laser – Includes (2) CR 1/3N lithium batteries - Black | 69270 |
| TLR-6 (GLOCK® 26/27/33) White LED and Red Laser – Includes (2) CR 1/3N lithium batteries - Black | 69272 |
| TLR-6 Universal Kit* – Includes LED/laser module and select TLR-6 body housings – Black | 69277 |
| TLR-6 (M&P® Shield™ 40/9) White LED/red laser – Includes (2) CR 1/3N lithium batteries – Black | 69273 |
| TLR-6 (GLOCK® 42/43) White LED/red laser – Includes (2) CR 1/3N lithium batteries – Flat Dark Earth | 69278 |
| TLR-6 (SIG SAUER® P365) White LED and Red Laser – Includes (2) CR 1/3N lithium batteries - Black | 69284 |
| TLR-6 (GLOCK® 43X/48 MOS) White LED and Red Laser – Includes (2) CR 1/3N lithium batteries - Black | 69286 |
| TLR-6 (SA Hellcat®) White LED and Red Laser – Includes (2) CR 1/3N lithium batteries - Black | 69287 |
| TLR-6 (Taurus GX4™) White LED/red laser - Includes (2) CR 1/3N lithium batteries – Black | 69288 |
| TLR-6 (GLOCK® 17/19/21) White LED/red laser – Includes (2) CR 1/3N lithium batteries - Black | 69290 |
| TLR-6 (SA XD®) White LED/red laser – Includes (2) CR 1/3N lithium batteries - Black | 69291 |
| TLR-6 (S&W M&P®) White LED/red laser – Includes (2) CR 1/3N lithium batteries - Black | 69293 |
| **NON-LASER MODELS** | |
| TLR-6 (GLOCK® 42/43) Without Laser – White LED - Includes (2) CR 1/3N lithium batteries - Black | 69280 |
| TLR-6 (GLOCK® 26/27/33) Without Laser – White LED -  Includes (2) CR 1/3N lithium batteries - Black | 69282 |
| TLR-6 (M&P® Shield™) Without Laser – White LED – Includes (2) CR 1/3N lithium batteries – Black | 69283 |
| TLR-6 (SIG SAUER® P365®/XL) Without Laser – White LED – Includes (2) CR 1/3N lithium batteries – Black | 69285 |

*Universal Kit includes one LED/laser Aiming module and the following shells: GLOCK 42, GLOCK 26, M&P Shield, KAHR ARMS, SIG SAUER, KIMBER Micro. (Flat Dark Earth, Rail Mount, 1911 & Non Laser models not included.)

| Size and Weight | Battery |
|---|---|
| 2.30" (5.84 cm); 1.27 oz (36g) *SIZE & WEIGHT VARY BY MODEL* | (2) CR-1/3 N Lithium |

# TLR-6 HL®

**WHITE LIGHT ILLUMINATOR / RED LASER OR GREEN LASER**

**IPX4**

Weapon light features a high-power LED with red or green laser and a rechargeable battery system and portable charge case that allows for convenient storage and charging without the need to tether to your gun

- Designed to securely attach to multiple variations of weapons
- Includes three easy-to-swap batteries to triple your run time
- TLR-6 HL with 640-660nm red laser; TLR-6 HL G with 510-530nm green laser

| | |
|---|---|
| LUMENS | 300 |
| CANDELA | 4,250 |
| DISTANCE | 130m |
| RUN TIME | 20 min |

Red laser runs 9 hours
Green laser runs 5 hours

| Description | Item # |
|---|---|
| TLR-6 HL (GLOCK® 42/43) White LED and Red Laser – Includes (3) SL-B2 batteries and charger - Black | 69340 |
| TLR-6 HL (GLOCK® 42/43) White LED and Red Laser – Includes (3) SL-B2 batteries and charger - Flat Dark Earth | 69341 |
| TLR-6 HL (M&P® Sheild™ 40/9) White LED and Red Laser – Includes (3) SL-B2 batteries and charger - Black | 69342 |
| TLR-6 HL (GLOCK® Rail Mount) White LED and Red Laser – Includes (3) SL-B2 batteries and charger - Black | 69343 |
| TLR-6 HL (SIG SAUER® P365/XL) White LED and Red Laser – Includes (3) SL-B2 batteries and charger - Black | 69344 |
| TLR-6 HL G (GLOCK® 42/43) White LED and Green Laser – Includes (3) SL-B2 batteries and charger - Black | 69350 |
| TLR-6 HL G (GLOCK® 42/43) White LED and Green Laser – Includes (3) SL-B2 batteries and charger - Flat Dark Earth | 69351 |
| TLR-6 HL G (M&P® Sheild™ 40/9) White LED and Green Laser – Includes (3) SL-B2 batteries and charger - Black | 69352 |
| TLR-6 HL G (GLOCK® Rail Mount) White LED and Green Laser – Includes (3) SL-B2 batteries and charger - Black | 69353 |
| TLR-6 HL G (SIG SAUER® P365/XL) Without Laser – White LED – Includes (3) SL-B2 batteries and charger - Black | 69354 |

All Rights Reserved. M&P Shield™, GLOCK®, SIG SAUER® are registered trademarks of Smith & Wesson, GLOCK, Inc., SIG SAUER®, & Saeilo Enterprises, Inc. Streamlight has not sought endorsement of this product from Smith & Wesson®, GLOCK®

| Size and Weight | Battery |
|---|---|
| 2.5" (6.35 cm); 1.12 oz (31.8g) *SIZE & WEIGHT VARY BY MODEL* | (1) SL-B2 battery |

**SL-B2® charging case**
Charges batteries using USB-C cord
Features charge status indicator

Charging

Charged

# TLR-7® X

**IPX7**

Multi-fuel rail-mounted light accepts either Streamlight's SL-B9®
USB rechargeable battery pack or CR123A lithium battery

- User-interchangeable paddle switches to accommodate your shooting style
- Accepts either SL-B9 or CR123A batteries
- Front loading batteries

| LUMENS | 500 |
|---|---|
| CANDELA | 5,000 |
| DISTANCE | 140m |
| RUN TIME SL-B9 | 1 hr |
| RUN TIME CR123A | 1.5 hrs |

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR-7 X - Includes low switch, high switch, CR123A lithium battery and key kit - Black | 69424 | US | YES |
| TLR-7 X - Includes low switch, high switch, CR123A lithium battery and key kit - FDE | 69429 | US | YES |
| TLR-7 X USB - Includes key kit, high/low paddle switches, SL-B9 rechargeable battery pack and USB-C cord - Black | 69455 | US | YES |
| TLR-7 X USB - Includes key kit, high/low paddle switches, SL-B9 rechargeable battery pack and USB-C cord - FDE | 69456 | US | YES |

| Size and Weight | Battery |
|---|---|
| 2.58" (6.55 cm); SL-B9: 2.64 oz (74.8g) // CR123A: 2.48 oz (70.3g) | (1) SL-B9 battery pack or (1) CR123A lithium battery |

Safe Off feature prevents accidental activation; saves batteries

# TLR-7® X CONTOUR REMOTE

**IPX7**

Designed for one-handed shooting – ideal for dog handlers,
SWAT teams, door breaching and close-quarter operations

- Rail grip clamp system securely attaches/detaches quickly and safely with no tools and without putting your hands in front of muzzle
- Ambidextrous rear on/off switch; pressure-controlled grip switch provides momentary operation
- Cannot be retrofitted with existing TLR-7 X products
- Front loading batteries

| LUMENS | 500 |
|---|---|
| CANDELA | 5,000 |
| DISTANCE | 140m |
| RUN TIME SL-B9 | 1 hr |
| RUN TIME CR123A | 1.5 hrs |

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR-7 X Contour Remote - for GLOCK® GEN 4 or GEN 5 models - Includes mounting key and (1) CR123A battery - Black | 69428 | US | YES |
| TLR-7 X Contour Remote - for SIG SAUER® P320® XCARRY frame - Includes mounting key and (1) CR123A battery - Black | 69480 | US | YES |

| Size and Weight | Battery |
|---|---|
| 4.6" (11.68 cm); SL-B9: 2.85 oz (80.7g) // CR123A: 2.69 oz (76.3g) | (1) CR123A lithium battery (included) or (1) SL-B9 battery pack |

Safe Off feature prevents accidental activation; saves batteries

# TLR-7® HL-X

**WHITE LIGHT ILLUMINATOR**

**IPX7**

High-candela, multi-fuel, rail-mounted light accepts either Streamlight's SL-B9® USB-C rechargeable battery pack or a single CR123A lithium battery

- Facecap engineered to produce a longer reaching, tighter beam
- Includes interchangeable paddle switches to accommodate your shooting style
- User-programmable output modes
- Front loading batteries

| SL-B9 | DEFAULT | PROGRAMMABLE |
|---|---|---|
| LUMENS | 1,000 | 500 |
| CANDELA | 22,000 | 11,000 |
| DISTANCE | 297m | 210m |
| RUN TIME | 30 min | 1 hr |

| CR123A | |
|---|---|
| LUMENS | 500 |
| CANDELA | 11,000 |
| DISTANCE | 210m |
| RUN TIME | 1.5 hrs |

22,000 cd

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR-7 HL-X USB – Includes high switch mounted on light plus low switch in package, SL-B9 battery pack and key kit - Black | 69458 | US | YES |
| TLR-7 HL-X USB – Includes high switch mounted on light plus low switch in package, SL-B9 battery pack and key kit - FDE | 69459 | US | YES |

| Size and Weight | Battery |
|---|---|
| 2.9" (7.37 cm); SL-B9: 2.88 oz (81.6g) // CR123A: 2.8 oz (79.4g) | (1) SL-B9 battery pack or CR123A lithium battery |

Safe Off feature prevents accidental activation; saves batteries

# TLR-7® HL-X SUB

**WHITE LIGHT ILLUMINATOR**

**IPX7**

Designed for subcompact handguns with high-lumens,this multi-fuel rail-mounted light accepts either Streamlight's SL-B9® USB rechargeable battery pack or a CR123A lithium battery

- Features a specialized clamp system
- Interchangeable paddle switches accommodate your shooting style
- Front loading batteries

| SL-B9 | DEFAULT | PROGRAMMABLE |
|---|---|---|
| LUMENS | 1,000 | 500 |
| CANDELA | 10,000 | 5,000 |
| DISTANCE | 200m | 141m |
| RUN TIME | 30 min | 1 hr |

| CR123A | |
|---|---|
| LUMENS | 500 |
| CANDELA | 5,000 |
| DISTANCE | 141m |
| RUN TIME | 1.5 hrs |

**1000 LUMENS**

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR-7 HL-X sub USB (GLOCK® 43X/48 MOS | 43X/48 Rail) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black | 69503 | US | YES |
| TLR-7 HL-X sub USB (SIG SAUER® P365®/XL closed rail systems*) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black    *Does not fit the P365® XMACRO | 69504 | US | YES |
| TLR-7 HL-X sub USB (1913 short) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black | 69505 | US | YES |
| TLR-7 HL-X sub USB (Springfield Armory® Hellcat®) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black | 69506 | US | YES |

Safe Off feature prevents accidental activation; saves batteries

| Size and Weight | Battery |
|---|---|
| 2.51" (6.38 cm); SL-B9: 2.49 oz (70.6g) // CR123A: 2.39 oz (67.8g) | (1) SL-B9 battery or (1) CR123A lithium battery |

**ALL NEW**
# TLR-8® HL-X

# TLR-8® HL-X // TLR-8® HL-X G

**WHITE LIGHT ILLUMINATOR / RED LASER / GREEN LASER**

**IPX4**

High-candela, rail-mounted light with red or green laser that accepts either Streamlight's SL-B9® USB-C rechargeable battery pack or CR123A lithium battery

- Facecap engineered to produce a longer reaching, tighter beam
- Interchangeable rear paddle switches accommodate your shooting style
- User-programmable output modes
- Front loading batteries

| SL-B9 | DEFAULT | PROGRAMMABLE |
|---|---|---|
| LUMENS | 1,000 | 500 |
| CANDELA | 22,000 | 11,000 |
| DISTANCE | 297m | 210m |
| RUN TIME | 30 min | 1 hr |

| CR123A | |
|---|---|
| LUMENS | 500 |
| CANDELA | 11,000 |
| DISTANCE | 210m |
| RUN TIME | 1.5 hrs |

Red laser mode runs 29 hours
Green laser mode runs 10 hours

**22,000 cd**

Safe Off feature prevents accidental activation; saves batteries

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR-8 HL-X USB – Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black | 69465 | US | YES |
| TLR-8 HL-X G USB – Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black | 69475 | US | YES |

| Size and Weight | Battery |
|---|---|
| 2.9" (7.37 cm); SL-B9: 3.14 oz (89g) // CR123A: 3.04 oz (86.2g) | (1) SL-B9 battery pack or (1) CR123A lithium battery |

# TLR-8® HL-X SUB

**IPX4**

**WHITE LIGHT ILLUMINATOR / RED LASER**

Designed for subcompact handguns, this multi-fuel rail-mounted light with integrated red laser accepts either Streamlight's SL-B9® USB rechargeable battery pack or a CR123A lithium battery

- Features a specialized clamp system
- Interchangeable rear paddle switches accommodate your shooting style
- Front loading batteries

| SL-B9 | DEFAULT | PROGRAMMABLE |
|---|---|---|
| LUMENS | 1,000 | 500 |
| CANDELA | 10,000 | 5,000 |
| DISTANCE | 200m | 141m |
| RUN TIME | 30 min | 1 hr |

| CR123A | |
|---|---|
| LUMENS | 500 |
| CANDELA | 5,000 |
| DISTANCE | 141m |
| RUN TIME | 1.5 hrs |

Laser mode runs 29 hrs

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR-8 HL-X sub USB (GLOCK® 43X/48 MOS | 43X/48 Rail) - Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black | 69466 | US | YES |
| TLR-8 HL-X sub USB (SIG SAUER® P365®/XL closed rail systems*) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black    *Does not fit the P365® XMACRO | 69467 | US | YES |
| TLR-8 HL-X sub USB (1913 short model) - Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord- Black | 69468 | US | YES |
| TLR-8 HL-X sub USB (SA® Hellcat®) - Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black | 69469 | US | YES |

**1000 LUMENS**

Safe Off feature prevents accidental activation; saves batteries

| Size and Weight | Battery |
|---|---|
| 2.58" (6.55 cm); 2.74 oz (77.7g) | (1) SL-B9 battery pack or (1) CR123A lithium battery |

# TLR-8® HL-X G SUB

**IPX4**

**WHITE LIGHT ILLUMINATOR / GREEN LASER**

Designed for subcompact handguns, this multi-fuel rail-mounted light with integrated green laser accepts either Streamlight's SL-B9® USB rechargeable battery pack or a CR123A lithium battery

- Features a specialized clamp system
- Interchangeable rear paddle switches accommodate your shooting style
- Front loading batteries

| SL-B9 | DEFAULT | PROGRAMMABLE |
|---|---|---|
| LUMENS | 1,000 | 500 |
| CANDELA | 10,000 | 5,000 |
| DISTANCE | 200m | 141m |
| RUN TIME | 30 min | 1 hr |

| CR123A | |
|---|---|
| LUMENS | 500 |
| CANDELA | 5,000 |
| DISTANCE | 141m |
| RUN TIME | 1.5 hrs |

Laser mode runs 10 hrs

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR-8 HL-X G sub USB (GLOCK® 43X/48 MOS | 43X/48 Rail) - Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black | 69476 | US | YES |
| TLR-8 HL-X G sub USB (SIG SAUER® P365®/XL closed rail systems*) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black *Does not fit the P365® XMACRO | 69477 | US | YES |
| TLR-8 HL-X G sub USB (1913 short model) - Includes mounting kit with key, multi-tool, (1) SL-B9 rechargeable battery pack and USB-C cord - Black | 69478 | US | YES |
| TLR-8 HL-X G sub USB (SA® Hellcat®) - Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black | 69479 | US | YES |

**1000 LUMENS**

Safe Off feature prevents accidental activation; saves batteries

| Size and Weight | Battery |
|---|---|
| 2.58" (6.55 cm); 2.74 oz (77.7g) | (1) SL-B9 battery pack or (1) CR123A lithium battery |

GET MORE INFO AT: STREAMLIGHT.COM // TUNE INTO YOUTUBE.COM/STREAMLIGHTTV

# TLR-8® X

**WHITE LIGHT ILLUMINATOR** / **RED LASER**

**IPX4**

Multi-fuel gun light with 640-660nm red laser designed to fit a variety of full-size and compact railed handguns

- Accepts either CR123A lithium or SL-B9 USB rechargeable battery pack
- Interchangeable rear paddle switches accommodate your shooting style
- Front loading batteries

| LUMENS | 500 |
|---|---|
| CANDELA | 5,000 |
| DISTANCE | 140m |
| RUN TIME SL-B9 | 1 hr |
| RUN TIME CR123A | 1.5 hrs |

Laser mode runs 60 hours

Safe Off feature prevents accidental activation; saves batteries

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR-8 X – Includes high switch mounted on light plus low switch in package, (1) CR123A battery and key kit - Black | 69414 | US | YES |

| Size and Weight | Battery |
|---|---|
| 2.58"(6.55 cm); CR123A: 2.64 oz (75g) // SL-B9: 2.74 oz (77.7g) | (1) SL-B9 battery pack or (1) CR123A lithium |

Interchangeable paddle switches easy to swap out with multi-tool (included)

# TLR-8® X G

**WHITE LIGHT ILLUMINATOR** / **GREEN LASER**

**IPX4**

Multi-fuel gun light with 510-530nm green laser designed to fit a variety of full-size and compact railed handguns

- Accepts either CR123A lithium or SL-B9 USB rechargeable battery pack
- Interchangeable rear paddle switches accommodate your shooting style
- Front loading batteries

| LUMENS | 500 |
|---|---|
| CANDELA | 5,000 |
| DISTANCE | 140m |
| RUN TIME SL-B9 | 1 hr |
| RUN TIME CR123A | 1.5 hrs |

Laser mode runs 11 hours

Safe Off feature prevents accidental activation; saves batteries

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR-8 X G – Includes high switch mounted on light plus low switch in package, (1) CR123A battery and key kit - Black | 69434 | US | YES |

| Size and Weight | Battery |
|---|---|
| 2.58" (6.55 cm); CR123A: 2.64 oz (75g) // SL-B9: 2.74 oz (77.7g) | (1) SL-B9 battery pack or (1) CR123A lithium |

Interchangeable paddle switches easy to swap out with multi-tool (included)

# ULTRA LOW PROFILE
# RAIL MOUNT LIGHTS

## DURABILITY, POWER & LONG RUN TIME

---

## TLR-7® X SUB
### WHITE LIGHT ILLUMINATOR

**IPX7**

Designed for subcompact handguns, this multi-fuel rail-mounted light accepts either Streamlight's SL-B9® USB rechargeable battery pack or a CR123A lithium battery

- Ultra-compact and lightweight
- Fits on select railed subcompact pistols
- Interchangeable rear paddle switches accommodate your shooting style
- Front loading batteries

| LUMENS | 500 |
|---|---|
| CANDELA | 5,000 |
| DISTANCE | 141m |
| RUN TIME | 1.5 hrs |

Safe Off feature prevents accidental activation; saves batteries

Interchangeable paddle switches easy to swap out with multi-tool (included)

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR-7 X sub (for GLOCK® 43X/48 MOS \| 43X/48 Rail Models Only) - Includes mounting kit with key and CR123A lithium battery - Black | 69400 | US | YES |
| TLR-7 X sub (for SIG SAUER® P365/XL Closed Rail System) - Includes mounting kit with key and CR123A lithium battery - Black | 69401 | US | YES |
| TLR-7 X sub (for 1913 short models) - Includes mounting kit with key and CR123A lithium battery - Black | 69402 | US | YES |
| TLR-7 X sub (for SA® Hellcat®) - Includes mounting kit with keys and CR123A lithium battery - Black | 69404 | US | YES |

| Size and Weight | Battery |
|---|---|
| 2.51" (6.38 cm); 2.39 oz (67.8g) | (1) CR123A lithium battery |

# TLR-8® X SUB

**WHITE LIGHT ILLUMINATOR / RED LASER**

**IPX4**

Multi-fuel rail-mounted light with red laser designed for subcompact handguns

- Features integrated 640-660nm red laser
- Interchangeable rear paddle switches accommodate your shooting style
- Front loading batteries

| LUMENS | 500 |
|---|---|
| CANDELA | 5,000 |
| DISTANCE | 140m |
| RUN TIME SL-B9 | 1 hr |
| RUN TIME CR123A | 1.5 hrs |

Laser mode: runs 60 hours

Safe Off feature prevents accidental activation; saves batteries

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR-8 X sub (GLOCK® 43X/48 MOS | 43X/48 Rail) - Includes mounting kit with key, multi-tool, and (1) CR123A lithium battery | 69411 | US | YES |
| TLR-8 X sub (SIG SAUER® P365®/XL closed rail systems*) - Includes mounting kit with key, multi-tool, and (1) CR123A lithium battery  *Does not fit the P365® XMACRO* | 69417 | US | YES |
| TLR-8 X sub (1913 short) - Includes mounting kit with keys, multi-tool, and (1) CR123A lithium battery | 69418 | US | YES |
| TLR-8 X sub (Springfield Armory® Hellcat®) - Includes mounting kit with key, multi-tool, and (1) CR123A lithium battery | 69419 | US | YES |

| Size and Weight | Battery |
|---|---|
| 2.51" (6.38 cm); CR123A: 2.77 oz (78.53g) // SL-B9: 2.87 oz (81.4g) | (1) SL-B9 battery pack or (1) CR123A lithium |

# TLR-8® X G SUB

**WHITE LIGHT ILLUMINATOR / GREEN LASER**

**IPX4**

Multi-fuel, rail-mounted light with green laser designed for subcompact handguns

- Features integrated 510-530nm green laser
- Interchangeable rear paddle switches accommodate your shooting style
- Front loading batteries

| LUMENS | 500 |
|---|---|
| CANDELA | 5,000 |
| DISTANCE | 140m |
| RUN TIME SL-B9 | 1 hr |
| RUN TIME CR123A | 1.5 hrs |

Laser mode runs 11 hours

Safe Off feature prevents accidental activation; saves batteries

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR-8 X G sub (GLOCK® 43X/48 MOS | 43X/48 Rail) - Includes mounting kit with key, multi-tool and (1) CR123A lithium battery - Black | 69431 | US | YES |
| TLR-8 X G sub (SIG SAUER® P365®/XL closed rail systems*) - Includes mounting kit with key, multi-tool and (1) CR123A lithium battery - Black  *Does not fit the P365® XMACRO* | 69437 | US | YES |
| TLR-8 X G sub (1913 short) - Includes mounting kit with keys, multi-tool and (1) CR123A lithium battery - Black | 69438 | US | YES |
| TLR-8 X G sub (Springfield Armory® Hellcat®) - Includes mounting kit with key, multi-tool and (1) CR123A lithium battery - Black | 69439 | US | YES |

| Size and Weight | Battery |
|---|---|
| 2.51" (6.38 cm); CR123A: 2.77 oz (78.53g) // SL-B9: 2.87 oz (81.4g) | (1) SL-B9 battery pack or (1) CR123A lithium |

# TLR-9®

**IPX7**

## Gun light designed to rapidly attach to full frame hand guns

- Produces a concentrated beam with optimum peripheral illumination
- Front-loading battery capability
- Rail grip clamp securely attaches/detaches without putting your hands in front of the muzzle
- Interchangeable paddle switches accommodate your shooting style

**1000 LUMENS**



Safe Off feature prevents accidental activation; saves batteries

| LUMENS | 1,000 |
|---|---|
| CANDELA | 10,000 |
| DISTANCE | 200m |
| RUN TIME | 1.5 hrs |

Strobe runs 3 hours

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR-9 - Includes rail locating keys and (2) CR123A lithium batteries with high/low switches - Black | 69464 | US | YES |

| Size and Weight | Battery |
|---|---|
| 3.87" (9.82 cm); 4.26 oz (120.9g) | (2) CR123A lithium batteries |



Interchangeable paddle switches easy to swap out with multi-tool (included)

## TLR-10®

**IPX4**

Gun light with red laser designed to rapidly attach to full frame hand guns

- Features a 640-660 nm red laser
- Produces a concentrated beam with optimum peripheral illumination
- Front-loading battery capability
- Rail grip clamp securely attaches/detaches without putting your hands in front of the muzzle
- Interchangeable paddle switches accommodate your shooting style

**1000 LUMENS**

| LUMENS | 1,000 |
|---|---|
| CANDELA | 10,000 |
| DISTANCE | 200m |
| RUN TIME | 1.5 hrs |

Strobe runs 60 hours

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR-10 - Includes rail locating keys and (2) CR123A lithium batteries with high/low switches - Black | 69470 | US | YES |

| Size and Weight | Battery |
|---|---|
| 3.87" (9.82 cm); 4.62 oz (131g) | (2) CR123A lithium |

Safe Off feature prevents accidental activation; saves batteries

Interchangeable paddle switches easy to swap out with multi-tool (included)

## TLR-10® G

**IPX4**

Gun light with green laser designed to rapidly attach to full frame hand guns

- Features a 510-530nm green laser
- Produces a concentrated beam with optimum peripheral illumination
- Front-loading battery capability
- Rail grip clamp securely attaches/detaches without putting your hands in front of the muzzle
- Interchangeable paddle switches accommodate your shooting style

| LUMENS | 1,000 |
|---|---|
| CANDELA | 10,000 |
| DISTANCE | 200m |
| RUN TIME | 1.5 hrs |

Laser mode runs 11 hours

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR-10 G - Includes high switch (mounted), low switch, (2) CR123A lithium batteries and key kit - Black | 69473 | US | YES |

| Size and Weight | Battery |
|---|---|
| 3.87" (9.82 cm); 4.62 oz (131g) | (2) CR123A lithium batteries |

Safe Off feature prevents accidental activation; saves batteries

# SPEEDLOCKER®

Portable, locking storage container that provides you with swift and direct access

- Patented mechanical keypad with 31 user selectable combinations; requires no batteries
- Rugged, water-resistant construction with convenient carry handle
- Accommodates various firearms

| Description | Item # | COO | TAA |
|---|---|---|---|
| SpeedLocker - Includes padlock and Allen Key | 59000 | US | YES |
| Padlock with 3 keys | 59001 | -- | -- |
| 3' (91.44 cm) Security Cable | 59002 | -- | -- |

### Size and Weight

Internal: 8" x 7.1" (20.3 x 18 cm) //
External: 12.4" x 8.2" x 2.78" (31.5 x 20.8 x 7.1 cm); 2.6 lbs. (1.2 kg)

*Notice: The SpeedLocker® is not an approved firearm safe. It is the user's responsibility to determine the suitability for the specific situation and need.*





Patented mechanical keypad with 31 user selectable combinations - requires no batteries



Fits various compact firearm models





Air travel suitable with supplied padlock

# SL-B9® BATTERY PACK
# TURN YOUR TLRs INTO RECHARGEABLE SYSTEMS



## SL-B9® PROTECTED LITHIUM-ION USB RECHARGEABLE BATTERY PACK

The battery that transforms multi-fuel, high performance gun lights into rechargeable systems

- Features USB-C input and charge status indicators; recharges in 2.5 hours
- Integrated safety circuit protects battery from overcharge

| Description | Item # |
|---|---|
| SL-B9 Li-Ion USB rechargeable battery pack - 2pk | 20237 |
| SL-B9 Li-Ion USB rechargeable battery pack - 8pk | 20238 |
| SL-B9 Li-Ion USB rechargeable battery pack - 100pk | 20239 |
| SL-B9 8-Unit Bank Charger - 12V - batteries not included | 20230 |
| SL-B9 8-Unit Bank Charger - 12V - Includes (8) SL-B9 batteries | 20231 |
| SL-B9 8-Unit Bank Charger - 120V - batteries not included | 20233 |
| SL-B9 8-Unit Bank Charger - 120V - Includes (8) SL-B9 batteries | 20234 |
| 22" (55.88 cm) USB-C Cord | 22084 |

| Size and Weight | Battery |
|---|---|
| 1.36" x 0.67" (3.45 x 1.7 cm); 0.72 oz (20.4g) | 850mAh SL-B9 protected Li-Ion USB rechargeable battery pack |



CHARGING     CHARGED



SL-B9 Bank Charger

**NFPA** Meets requirements of NFPA 1900-11.1.11.2 (2024); mounted in upright position

# TLR RM SERIES

## TLR® RM 1 HL-X  COMPACT RAIL MOUNTED LIGHTING SYSTEM

**IPX7**

Experience a longer-reaching, tighter beam with increased lumens and candela for superior visibility with this multi-fuel long gun light

- Designed to provide increased candela while maintaining lumen output
- Independently operating push-button and remote pressure switches
- System is packaged as a kit
- Front loading batteries

**1000 LUMENS**

**22,000 cd**

|  | SL-B9 | CR123A |
|---|---|---|
| **LUMENS** | 1,000 | 500 |
| **CANDELA** | 22,000 | 11,000 |
| **DISTANCE** | 297m | 210m |
| **RUN TIME** | 30 min | 1.5 hrs |

Safe Off feature prevents accidental activation; saves batteries

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR RM 1 HL-X USB - System - Includes straight momentary pressure switch, key kit, USB-C cord and (1) SL-B9 battery pack - Black | 69483 | US | YES |
| TLR RM 1 HL-X USB - Light Only - Includes key kit, USB-C cord and (1) SL-B9 battery pack - Black | 69484 | US | YES |

Optional M-LOK® mount sold separately

| Size and Weight | Battery |
|---|---|
| 3.64" (9.25 cm); SL-B9: 3.12 oz (88.5g) // CR123A: 3.02 oz (85.6g) | (1) SL-B9 battery pack |

**HIGH CANDELA** BEAM PATTERN

# TLR® RM 1

Compact TLR® RM 1 delivers a longer-reaching, tighter beam, optimized for increased candela while preserving lumen output

- Independently operating push-button and remote pressure switches
- System is packaged as a kit
- Front loading batteries

| LUMENS | 500 |
|---|---|
| CANDELA | 11,000 |
| DISTANCE | 210m |
| RUN TIME | 1.5 hrs |

Strobe runs 3 hours

11,000 cd

HIGH CANDELA
BEAM PATTERN

Safe Off feature prevents accidental activation; saves batteries

Optional M-LOK® mount sold separately

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR RM 1 - System - Includes remote pressure switch, mounting clips and CR123A lithium battery - Black | 69440 | US | YES |
| TLR RM 1 - Light Only - Includes key kit and CR123A lithium battery - Black | 69441 | US | YES |
| TLR RM 1 - with Dual Remote Switch - Black | 69442 | US | YES |

| Size and Weight | Battery |
|---|---|
| 3.64" (9.25 cm); 3.02 oz (85.6g) | (1) CR123A lithium |

TLR RM 1 with Remote Pressure Switch: 69440

# TLR® RM 2

The larger TLR® RM 2 offers an enhanced performance with a longer-reaching, tighter beam and even greater candela production, all while maintaining high-lumen output

- Independently operating push-button and remote pressure switches
- System is packaged as a kit
- Front loading batteries

| LUMENS | 1,000 |
|---|---|
| CANDELA | 22,000 |
| DISTANCE | 297m |
| RUN TIME | 1.5 hrs |

Strobe runs 3 hours

22,000 cd

Optional M-LOK® mount sold separately

Safe Off feature prevents accidental activation; saves batteries

TLR RM 2 with Remote Pressure Switch: 69450

| Description | Item # |
|---|---|
| TLR RM 2 - System - Includes remote pressure switch, mounting clips and (2) CR123A lithium batteries - Black | 69450 |
| TLR RM 2 - Light Only - Includes CR123A lithium battery - Black | 69451 |

| Size and Weight | Battery |
|---|---|
| 4.97" (12.6 cm); 4.68 oz (132.7g) | (2) CR123A lithium |
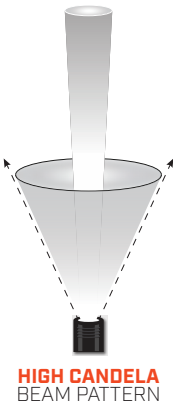
HIGH CANDELA
BEAM PATTERN

# TLR® RM 1 LASER

**WHITE LIGHT ILLUMINATOR / RED LASER**

**IPX4**

Compact rail-mounted light with red laser delivers a longer-reaching, tighter beam, optimized for increased candela while preserving lumen output

- Independently operating push-button and remote pressure switches
- System is packaged as a kit
- Front loading batteries

11,000 cd

| LUMENS | 500 |
|---|---|
| CANDELA | 11,000 |
| DISTANCE | 210m |
| RUN TIME | 1.5 hrs |

Strobe runs 3 hours
Laser runs 60 hours

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR RM 1 Laser - System - Includes remote pressure switch, mounting clips, CR123A lithium battery - Black | 69445 | US | YES |
| TLR RM 1 Laser - Light Only - Includes key kit and (1) CR123A lithium battery - Black | 69446 | US | YES |

| Size and Weight | Battery |
|---|---|
| 3.64" (9.25 cm); 3.24 oz (91.9g) | (1) CR123A lithium |

**HIGH CANDELA** BEAM PATTERN

Safe Off feature prevents accidental activation; saves batteries

Optional M-LOK® mount sold separately

TLR RM 1 Laser with Remote Pressure Switch: 69445

---

# TLR® RM 2 LASER

**WHITE LIGHT ILLUMINATOR / RED LASER**

**IPX4**

The larger TLR® RM 2 Laser with red laser offers an enhanced performance with a longer-reaching, tighter beam and even greater candela production, all while maintaining high-lumen output

- Independently operating push-button and remote pressure switches
- System is packaged as a kit
- Front loading batteries

22,000 cd

| LUMENS | 1,000 |
|---|---|
| CANDELA | 22,000 |
| DISTANCE | 297m |
| RUN TIME | 1.5 hrs |

Strobe runs 3 hours
Laser runs 60 hours

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR RM 2 Laser - System - Includes remote pressure switch, mounting clips and (2) CR123A lithium batteries - Black | 69447 | US | YES |
| TLR RM 2 Laser - Light Only - Includes key kit and (2) CR123A lithium batteries - Black | 69448 | US | YES |

| Size and Weight | Battery |
|---|---|
| 4.97" (12.6 cm); 5.11 oz (144.7g) | (2) CR123A lithium |

**HIGH CANDELA** BEAM PATTERN

Safe Off feature prevents accidental activation; saves batteries

Optional M-LOK® mount sold separately

TLR RM 2 Laser with Remote Pressure Switch: 69447

# TLR® RM 1 LASER-G

**WHITE LIGHT ILLUMINATOR / GREEN LASER**

**IPX4**

Compact rail-mounted light with green laser delivers a longer-reaching, tighter beam, optimized for increased candela while preserving lumen output

- Independently operating push-button and remote pressure switches
- System is packaged as a kit
- Front loading battery capability

| LUMENS | 500 |
|---|---|
| CANDELA | 11,000 |
| DISTANCE | 210m |
| RUN TIME | 1.5 hrs |

Strobe runs 3 hours
Laser runs 11 hours

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR RM 1 Laser-G - System - Includes remote pressure switch, mounting clips and (2) CR123A lithium batteries - Black | 69443 | US | YES |
| TLR RM 1 Laser-G - Light Only - Includes key kit and (2) CR123A lithium batteries | 69444 | US | YES |

| Size and Weight | Battery |
|---|---|
| 3.64" (9.25 cm); 3.24 oz (91.9g) | (1) CR123A lithium |

11,000 cd

**HIGH CANDELA** BEAM PATTERN

Safe Off feature prevents accidental activation; saves batteries

Optional M-LOK® mount sold separately

TLR RM 1 Laser-G with Remote Pressure Switch: 69443

---

# TLR® RM 2 LASER-G

**WHITE LIGHT ILLUMINATOR / GREEN LASER**

**IPX4**

The larger TLR® RM 2 Laser G with green laser offers enhanced performance with a longer-reaching, tighter beam and even greater candela production, all while maintaining high-lumen output

- Independently operating push-button and remote pressure switches
- System is packaged as a kit
- Front loading battery capability

| LUMENS | 1,000 |
|---|---|
| CANDELA | 22,000 |
| DISTANCE | 297m |
| RUN TIME | 1.5 hrs |

Strobe runs 3 hours
Laser runs 11 hours

| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR RM 2 Laser-G - System - Includes remote pressure switch, mounting clips and (2) CR123A lithium batteries - Black | 69453 | US | YES |
| TLR RM 2 Laser-G - Light Only - Includes key kit and (2) CR123A lithium batteries - Black | 69454 | US | YES |

| Size and Weight | Battery |
|---|---|
| 4.97" (12.6 cm); 5.11 oz (144.7g) | (2) CR123A lithium |
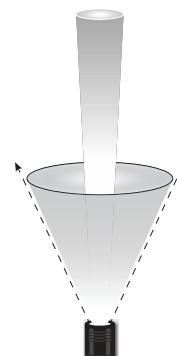
22,000 cd

**HIGH CANDELA** BEAM PATTERN

Safe Off feature prevents accidental activation; saves batteries

Optional M-LOK® mount sold separately

TLR RM 2 Laser-G with Remote Pressure Switch: 69453

# TLR-1 HPL®

WHITE LIGHT ILLUMINATOR

**IPX7**

High-lumen, long-range, rail-mounted tactical light that produces an intensely bright, far-reaching wide beam

- Deep dish parabolic reflector produces long-range targeting beam with optimum peripheral illumination
- Available with either standard door switch or remote door switch

| | |
|---|---|
| LUMENS | 1,000 |
| CANDELA | 60,000 |
| DISTANCE | 490m |
| RUN TIME | 1.5 hrs |

**1000 LUMENS**



| Description | Item # | COO | TAA |
|---|---|---|---|
| TLR-1 HPL Standard Switch - Includes rail locating keys and lithium batteries - Black | 69215 | US | YES |
| TLR-1 HPL Remote Switch - Includes rail locating keys, remote switch, door switch and lithium batteries - Black | 69216 | US | YES |
| TLR-1 HPL Long Gun Kit - Includes Safe off remote door switch, remote pressure switch, mounting clips, standard door switch and lithium batteries - Black | 69219 | US | YES |

Long gun kit
69219

| Size and Weight | Battery |
|---|---|
| 4.83" (12.27 cm); 5.6 oz (158.8g) // With Remote: 5.25" (13.34 cm); 5.9 oz (167.3g) | (2) CR123A lithium |

# TL-RACKER®

**IPX7**

All-in-one integrated shotgun forend light that reduces snag by eliminating the need for remote cords

- Ideal for shotgun breaching and close-quarter operations
- Ease of access with momentary and constant on modes
- Elongated switch pad accommodates virtually any hand size

**1000 LUMENS**



Mossberg 590® Shockwave model

Models available for Mossberg 500®/590® and Remington 870™

| LUMENS | 1,000 |
|---|---|
| CANDELA | 20,000 |
| DISTANCE | 283m |
| RUN TIME | 1.5 hrs |

| Description | Item # | COO | TAA |
|---|---|---|---|
| TL-Racker - Mossberg 500/590 - Includes (2) CR123A lithium batteries - Black | 69600 | US | YES |
| TL Racker - Remington 870 - Includes (2) CR123A lithium batteries - Black | 69601 | US | YES |
| TL Racker - Mossberg 590 Shockwave with strap - Includes (2) CR123A lithium batteries - Black | 69602 | US | YES |
| TL Racker - Mossberg 500/590 - Includes (2) CR123A lithium batteries - Orange | 69610 | US | YES |
| TL Racker - Remington 870 - Includes (2) CR123A lithium batteries - Orange | 69611 | US | YES |
| TL-Racker Forend Wrench | 69603 | -- | -- |

Note: For TL Rackers #69610 and #69611; Orange designed for less lethal options

| Size and Weight | Battery |
|---|---|
| 8" (20.32 cm); 12.1 oz (343g) | (2) CR123A lithium |

# TLR ACCESSORIES

| | ITEM # | TLR-1 HL-X | TLR-1 HL/ TLR-2 HL | TLR-2 G/ TLR-2 HL G | TLR-1/ TLR-1s | TLR-2/ TLR-2s | TLR- VIR II | TLR-6 | TLR-6 HL/ TLR-6 HL G | TLR-7 X USB | TLR-7 HL-X USB |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Ambidextrous Vert. Grip with Rail | 69114 | √ | √ | √ | √ | √ | | | | | |
| TLR 12 ga. Mag Mount Mag Tube/Mossberg Rail | 69901 | √ | √ | √ | √ | √ | | | | √ | √ |
| Remington 870 Mount | 69906 | √ | √ | √ | √ | √ | | | | √ | √ |
| TLR-1 and TLR-2 Key Kit | 69175 | | √ | √ | √ | √ | | | | | |
| TLR-7 X/TLR-8 X/TLR-9/TLR-10 Key Kit | 69177 | | | | | | | | | √ | √ |
| TLR M-LOK® Mount | 88301 | √ | √ | √ | √ | √ | | | | | |
| Contour Remote - GLOCK® | 69300 | | √ | √ | √ | √ | | | | | |
| Contour Remote - M&P® | 69310 | | √ | √ | √ | √ | | | | | |
| Contour Remote - SIG SAUER® P320® | 69481 | | √ | √ | √ | √ | | | | | |
| TLR-1/TLR-2 Remote Door Switch | 69130 | | √ | √ | √ | √ | | | | | |
| Door Switch with Safe Off | 69161 | | √ | √ | √ | √ | | | | | |
| Tail Switch Kit TLR-7 X and TLR-9 | 69490 | | | | | | | | | √ | √ |
| Tail Switch Kit TLR-8 X/TLR-8 X G/TLR-10/TLR-10 G | 69491 | | | | | | | | | | |
| Tail Switch Kit TLR-7 X sub | 69492 | | | | | | | | | | |
| Tail Switch Kit TLR-8 X sub/TLR-8 X G sub | 69493 | | | | | | | | | | |
| Tape Switch | 69132 | | √ | √ | √ | √ | | | | | |
| Coil Pressure Switch | 69134 | | √ | √ | √ | √ | | | | | |
| Straight Momentary Pressure Switch | 69135 | | √ | √ | √ | √ | | | | | |
| Straight Latching Pressure Switch | 89008 | | √ | √ | √ | √ | | | | | |
| Dual Remote Switch | 69138 | | √ | √ | √ | √ | | | | | |
| Remote Retaining Clips | 88178 | | √ | √ | √ | √ | √ | | | | |
| Red Flip Lens | 69115 | √ | √ | √ | √ | √ | √ | | | | |
| Blue Flip Lens | 69116 | √ | √ | √ | √ | √ | √ | | | | |
| Green Flip Lens | 69117 | √ | √ | √ | √ | √ | √ | | | | |
| IR Flip Lens | 69118 | √ | √ | √ | √ | √ | √ | | | | |
| Opaque Flip Lens | 69124 | √ | √ | √ | √ | √ | √ | | | | |
| CR123A Batteries - 2pk | 85175 | √ | √ | √ | √ | √ | √ | | | √ | √ |
| CR123A Batteries - 8pk | 85180 | √ | √ | √ | √ | √ | √ | | | √ | √ |
| CR123A Batteries - 12pk | 85177 | √ | √ | √ | √ | √ | √ | | | √ | √ |
| CR123A Batteries - 400pk | 85179 | √ | √ | √ | √ | √ | √ | | | √ | √ |
| CR1/3N Batteries - 2pk | 69271 | | | | | | | √ | | | |
| CR1/3N Batteries - 12pk | 69281 | | | | | | | √ | | | |
| SL-B9 Battery Pack - 2pk | 20237 | √ | | | | | | | | √ | √ |
| SL-B9 Battery Pack - 8pk | 20238 | | | | | | | | | √ | √ |
| SL-B9 Battery Pack - 100pk | 20239 | | | | | | | | | √ | √ |
| SL-B2 Battery - 2pk | 22121 | | | | | | | | √ | | |
| SL-B2 Charging Case | 22120 | | | | | | | | √ | | |



69114



69901



69906



88301



69300, 69310, 69481



88178



69115  69117
69116  69118

| TLR-8 HL-X / TLR-8 HL-X G | TLR-8 X / TLR-8 X G | TLR-7 X SUB | TLR-8 X SUB / TLR-8 X G SUB | TLR-7 HL-X SUB / TLR-8 HL-X SUB / TLR-8 HL-X G SUB | TLR-7 X CONTOUR REMOTE | TLR-9 | TLR-10 / TLR-10 G | TLR® RM 1 HL-X USB | TLR RM 1 / TLR RM-2 SERIES | TLR-1 HPL | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | √ |  69175 | |
| | √ | | | | | √ | √ | | | √ |  69177 | |
| | √ | | | | | √ | √ | | | √ | | |
| | | | | | | | | | | √ | | |
| | √ | | | | | √ | √ | √ | √ | |  69130 | |
| | | | | | | | | √ | √ | √ | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | |  69161 | |
| | | | | | | | | | | √ | | |
| | | | | | | | | | | √ | | |
| | | | | | | √ | | | | | | |
| | √ | | | | | | √ | | | |  69490 | |
| | | √ | | | | | | | | | | |
| √ | | | √ | √ | | | | | | |  69491 | |
| | | | | | | | | | | √ | | |
| | | | | | | | | | | √ | | |
| | | | | | | | | √ | √ | √ |  69493 | |
| | | | | | | | | √ | √ | √ | | |
| | | | | | | | | √ | √ | √ | | |
| | | | | | | √ | √ | √ | √ | √ |  69492 | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| √ | √ | √ | √ | √ | √ | √ | √ | √ | √ | √ |  69132 | |
| √ | √ | √ | √ | √ | √ | √ | √ | √ | √ | √ | | |
| √ | √ | √ | √ | √ | √ | √ | √ | √ | √ | √ | | |
| √ | √ | √ | √ | √ | √ | √ | √ | √ | √ | √ |  69134 | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| √ | √ | √ | √ | √ | √ | | | | √ | |  69135 | |
| √ | √ | √ | √ | √ | √ | | | | √ | | | |
| √ | √ | √ | √ | √ | √ | | | | √ | | | |
| | | | | | | | | | | |  89008 | |
| | | | | | | | | | | | | |


20237, 20238, 20239


22121


22120


69271 and 69281


85175
85180
85177
85179


69138

## PROTAC® RAIL MOUNT 1    LONG GUN LIGHT

Long gun light featuring a fixed mount for MIL-STD-1913 (Picatinny) rails or M-Lok® mount

- Uses either a remote switch with momentary/constant on operation or a standard push-button tail switch
- Multi-fuel; uses either a lithium or alkaline battery
- TEN-TAP® Programmable

**IPX7**
With Remote Pressure Switch installed

**IPX4**
With Standard button switch installed

| CR123A | HIGH | LOW | ALKALINE | HIGH | LOW |
|--------|------|-----|----------|------|-----|
| LUMENS | 350 | 40 | LUMENS | 150 | 40 |
| CANDELA | 12,000 | 1,380 | CANDELA | 4,950 | 1,380 |
| DISTANCE | 219m | 19m | DISTANCE | 141m | 19m |
| RUN TIME | 1.75 hrs | 14.5 hrs | RUN TIME | 1.5 hrs | 8 hrs |

Strobe runs 2.75 hours

| Description | Item # |
|-------------|--------|
| ProTac Rail Mount 1 - Includes remote pressure switch, tailcap switch, mounting hardware, M-LOK mount, (1) AA alkaline battery and (1) CR123A lithium battery - Black | 88058 |

| Size and Weight | Battery |
|-----------------|---------|
| 4.25" (10.8 cm); CR123A: 4.3 oz (121.9g) // Alkaline: 4.5 oz (127.57g) | (1) CR123A lithium or (1) alkaline |

# PROTAC® RAIL MOUNT 2   LONG GUN LIGHT

**IP54**
With Remote Pressure Switch installed

**IP67**
With Standard button switch installed

Long light featuring a fixed mount for MIL-STD-1913 (Picatinny) rails or M-Lok® mount

- Uses either a remote switch with momentary/constant on operation or a standard push-button tail switch
- MIL-STD 1913 or M-LOK® compatible rails
- TEN-TAP® Programmable

|  | HIGH | LOW |
|---|---|---|
| LUMENS | 625 | 60 |
| CANDELA | 22,000 | 2,000 |
| DISTANCE | 297m | 89m |
| RUN TIME | 2 hrs | 21 hrs |

Strobe runs 2.75 hours

| Description | Item # |
|---|---|
| ProTac Rail Mount 2 - Includes remote pressure switch, tailcap switch, mounting hardware, M-LOK® mount and (2) CR123A lithium batteries - Black | 88059 |

| Size and Weight | Battery |
|---|---|
| 5" (12.7 cm); 5 oz (141.7g) | (2) CR123A lithium batteries |

# PROTAC® RAIL MOUNT HL-X   LONG GUN LIGHT

**IP54**
With Remote Pressure Switch installed

**IP67**
With Standard button switch installed

High-lumen long gun light featuring a fixed mount for MIL-STD-1913 (Picatinny) rails or with the included M-LOK® mount allowing for alternative mounting options

- Uses either a remote switch with momentary/constant on operation or a standard push-button tail switch
- TEN-TAP® Programmable

**1000 LUMENS**

|  | HIGH | LOW |
|---|---|---|
| LUMENS | 1000 | 60 |
| CANDELA | 50,000 | 3,100 |
| DISTANCE | 447m | 111m |
| RUN TIME CR123A | 1.25 hrs | 21 hrs |
| RUN TIME SL-B26 | 1.75 hrs | 24 hrs |

Strobe runs 2.5 hours (CR123A) // 3.5 hours (SL-B26)

| Description | Item # |
|---|---|
| ProTac Rail Mount HL-X - Includes remote pressure switch, tailcap switch, mounting hardware, M-LOK® mount and (2) CR123A lithium batteries - Black | 88066 |
| ProTac Rail Mount HL-X USB - Includes remote switch, tail switch, remote retaining clips mounting hardware, M-LOK mount, (1) SL-B26 battery pack and USB cord - Black | 88071 |

| Size and Weight | Battery |
|---|---|
| 5.43" (13.8 cm); CR123A: 6.4 oz (181.4g) // SL-B26: 6.9 oz (195.6g) | (2) CR123A lithium or (1) SL-B26 battery pack |

## PROTAC® RAIL MOUNT HP-X PRO  LONG GUN LIGHT

**IPX7**
Without Remote Pressure Switch installed

**IPX4**
With Remote Pressure Switch installed

Long range, high-candela long gun light with Jack Cap® switch

- Featured Jack-Cap® tailcap switch offers operational switch redundancy with both push-button operation or remote pressure switch operation
- TEN-TAP® Programmable

|  | HIGH | LOW |
|---|---|---|
| **LUMENS** | 800 | 55 |
| **CANDELA** | 105,000 | 7,600 |
| **DISTANCE** | 648m | 174m |
| **RUN TIME** SL-B26 | 2 hrs | 26 hrs |
| **RUN TIME** CR123A | 1.5 hrs | 18 hrs |

Strobe runs 2.5 hours (CR123A) // 3.5 hours (SL-B26)

105,000 cd

| Description | Item # |
|---|---|
| ProTac Rail Mount HP-X Pro - System - Includes JackCap tail cap switch, M-LOK mount, mounting hardware, Allen wrench, straight momentary pressure switch and (2) CR123A lithium batteries | 89015 |
| ProTac Rail Mount HP-X Pro USB - System - Includes Jack-Cap tail cap switch, M-LOK® mount, mounting hardware, Allen wrench, straight momentary pressure switch, (1) SL-B26 battery pack and USB-C cord - Black | 89016 |
| ProTac Rail Mount HP-X Pro - Light Only - Includes Jack-Cap tail cap switch, M-LOK mount, Allen wrench and (2) CR123A lithium batteries - Black | 89017 |
| ProTac Rail Mount HP-X Pro USB - Light Only - Includes Jack Cap tailcap switch, M-LOK mount, Allen wrench, (1) SL-B26 rechargeable battery pack and USB cord - Black | 89018 |

| Size and Weight | Battery |
|---|---|
| 5.63" (14.3 cm); SL-B26: 7 oz (198g) // CR123A: 6.4 oz (181g) | (1) SL-B26 battery pack or (2) CR123A lithium batteries |

# PROTAC® RAIL MOUNT HL-X PRO   LONG GUN LIGHT

**IP54**
With Remote Pressure Switch installed

**IP67**
With Standard button switch installed

Long range, low-profile, long gun light features a Jack-Cap® tail cap switch that offers operational switch redundancy with both push-button operation or remote pressure switch operation

- Uses either a remote switch with momentary/constant on operation or a standard push-button tail switch
- MIL-STD-1913 or M-LOK® compatible rails
- TEN-TAP® Programmable

**1000 LUMENS**

|  | HIGH | LOW |
|---|---|---|
| LUMENS | 1,000 | 60 |
| CANDELA | 50,000 | 3,100 |
| DISTANCE | 447m | 111m |
| RUN TIME CR123A | 1.25 hrs | 21 hrs |
| RUN TIME SL-B26 | 1.75 hrs | 24 hrs |

Strobe runs 2.5 hours (CR123A) // 3.5 hours (SL-B26)

| Description | Item # |
|---|---|
| ProTac Rail Mount HL-X Pro - Includes Jack-Cap®, momentary remote switch, remote retaining clips, mounting hardware, M-LOK mount and (2) CR123A lithium batteries - Black | 88126 |
| ProTac Rail Mount HL-X Pro USB - Includes Jack-Cap®, M-LOK® kit, momentary switch, hardware kit, 2.5 mm Allen Wrench, (1) SL-B26 battery pack and USB cord - Box - Black | 88127 |
| ProTac Rail Mount HL-X Pro - Light Only - Includes Jack-Cap®, M-LOK mount and (2) CR123A lithium batteries - Black | 88128 |
| ProTac Rail Mount HL-X Pro USB - Light Only - Includes Jack-Cap®, M-LOK mount, (1) SL-B26 battery pack and USB cord - Black | 88129 |

| Size and Weight | Battery |
|---|---|
| 5.43" (13.8 cm); CR123A: 6.6 oz (187.1g) // SL-B26: 7.2 oz (204.1g) | (2) CR123A lithium or (1) SL-B26 |

49

# PROTAC® RAIL MOUNT HL-X LASER

**IPX4**

WHITE LIGHT ILLUMINATOR / RED LASER

High-lumen, long gun light with integrated red aiming laser with windage and elevation adjustments

- Unique functionality with its double switches; push button tailcap or remote pressure switch
- Multi-fuel; available as USB rechargeable system or lithium battery version
- TEN-TAP® Programmable

**1000 LUMENS**

|  | HIGH | LOW |
|---|---|---|
| LUMENS | 1,000 | 60 |
| CANDELA | 18,200 | 1,100 |
| DISTANCE | 270m | 66m |
| RUN TIME CR123A | 1.25 hrs | 20 hrs |
| RUN TIME SL-B26 | 1.5 hrs | 23 hrs |

Strobe runs 2.5 hours (CR123A) // 3.25 hours (SL-B26)

| Description | Item # |
|---|---|
| ProTac Rail Mount HL-X Laser - Includes remote pressure switch, tailcap switch, remote retaining clips, mounting hardware and (2) CR123A lithium batteries - Black | 88089 |
| ProTac Rail Mount HL-X Laser USB - Includes remote pressure switch, tailcap switch, remote retaining clips, mounting hardware and (1) SL-B26 battery pack and USB cord - Black | 88090 |

| Size and Weight | Battery |
|---|---|
| 6.56" (16.7 cm); SL-B26: 10.8 oz (306g) // CR123A: 10.3 oz (292g) | (2) CR123A lithium or (1) SL-B26 battery pack |

# PROTAC® 2.0 RAIL MOUNT LONG GUN LIGHT

**IP67**

High-performance tactical light that produces 2,000 lumens without sacrificing run time

- Powered by our proprietary SL-B50 rechargeable battery pack that charges inside the light using a USB-C cord
- MIL-STD 1913 or M-LOK® compatible rails
- TEN-TAP® Programmable

|  | HIGH | LOW |
|---|---|---|
| LUMENS | 2,000 | 250 |
| CANDELA | 17,700 | 2,150 |
| DISTANCE | 266m | 93m |
| RUN TIME | 2.5 hrs | 11 hrs |

Strobe runs 4.5 hours

**2000 LUMENS**

| Description | Item # |
|---|---|
| ProTac 2.0 Rail Mount - System - Includes straight momentary pressure switch, (1) SL-B50 battery pack, mounting hardware, USB-C cord and M-LOK® mount - Black | 89009 |
| ProTac 2.0 Rail Mount - Light Only - Includes (1) SL-B50 battery pack, USB-C cord and M-LOK® mount - Black | 89003 |

| Size and Weight | Battery |
|---|---|
| 6.3" (16 cm); 9.06 oz (257g) | (1) SL-B50 rechargeable battery pack |

# PROTAC® 2.0 RAIL MOUNT HP    LONG GUN LIGHT

**IP67**

High-performance tactical light that produces 2,000 lumens without sacrificing run time

- Powered by our proprietary SL-B50 rechargeable battery pack
- Charges inside the light, no need to remove from your weapon
- TEN-TAP® Programmable

85,000 cd

|  | HIGH | LOW |
|---|---|---|
| LUMENS | 2,000 | 250 |
| CANDELA | 85,000 | 11,500 |
| DISTANCE | 583m | 214m |
| RUN TIME | 2.5 hrs | 11 hrs |

Strobe runs 4.5 hours

| Description | Item # |
|---|---|
| ProTac 2.0 Rail Mount HP - System - Includes straight momentary pressure switch, (1) SL-B50 battery pack, mounting hardware, USB-C cord and M-LOK® - Black | 89014 |
| ProTac 2.0 Rail Mount HP - Light Only - Includes (1) SL-B50 battery pack, USB-C cord and M-LOK mount - Black | 89013 |

| Size and Weight | Battery |
|---|---|
| 6.3" (16 cm); 9.06 oz (257g) | (1) SL-B50 battery pack |

# PROTAC® 2.0 RAIL MOUNT HP

## 85,000 CANDELA | 2.5 HOUR RUN TIME

# PROTAC RAIL MOUNT ACCESSORIES

| DESCRIPTION | ITEM # | PROTAC RAIL MOUNT 1 AND 2 | PROTAC RAIL MOUNT HL-X | PROTAC 2.0 RAIL MOUNT SERIES | PROTAC RAIL MOUNT HL-X PRO | PROTAC RAIL MOUNT HL-X LASER | PROTAC RAIL MOUNT HP-X PRO |
|---|---|---|---|---|---|---|---|
| CR123A Lithium Batteries - 2pk | 85175 | √ | √ | | √ | √ | √ |
| CR123A Lithium Batteries - 6pk | 85177 | √ | √ | | √ | √ | √ |
| CR123A Lithium Batteries - 12pk | 85179 | √ | √ | | √ | √ | √ |
| CR123A Lithium Batteries - 400pk | 85180 | √ | √ | | √ | √ | √ |
| SL-B26 Li-Ion USB Battery Pack Charge Cradle (Includes (2) SL-B26 battery packs and USB cord) | 22010 | | √ | | √ | √ | √ |
| 8-Unit SL-B26 Bank Charger - 12V DC | 20220 | | √ | | √ | √ | √ |
| 120V AC USB Charge Cord | 22071 | | √ | | √ | √ | √ |
| SL-B26 Battery Pack - 1pk | 22101 | | √ | | √ | √ | √ |
| SL-B26 Battery Pack - 2pk | 22102 | | √ | | √ | √ | √ |
| SL-B26 Battery Packs - 8pk | 22105 | | √ | | √ | √ | √ |
| SL-B50 Battery Pack - 1pk | 22111 | | | √ | | | |
| SL-B50 Battery Pack - 2pk | 22112 | | | √ | | | |
| 22" (55.88 cm) USB-C Cord | 22084 | | | √ | | | |
| M-LOK® Mount | 88300 | √ | √ | √ | √ | | √ |
| Remote Retaining Clips | 88178 | √ | √ | √ | √ | | √ |
| Red Filter | 69115 | √ | | | | | |
| Blue Filter | 69116 | √ | | | | | |
| Green Filter | 69117 | √ | | | | | |
| IR Filter | 69118 | √ | | | | | |
| Opaque Filter | 69124 | √ | | | | | |
| Jack-Cap® | 88130 | | | | √ | | √ |
| Remote Switch | 880175 | √ | | | | | |
| Remote Switch | 880276 | | | | | √ | |
| Straight Momentary Pressure Switch | 69135 | | | √ | √ | | √ |
| Straight Latching Switch | 89008 | | | √ | √ | | √ |


85175, 85177, 85179, 85180


22010


20220


22071


22101, 22102, 22105


22111, 22112


22084


88300


88178


69115, 69116, 69117, 69118, 69142


88130


880175


880276


69135


89008

## WEDGE® XT



**IPX7**

### Ultra-compact everyday carry flashlight

- Push-button tail switch for one-handed operation
- FIVE-TAP® lockout system prevents accidental activation inside your pocket or bag
- TEN-TAP® Programmable

|  | HIGH | LOW |
|---|---|---|
| LUMENS | 500 | 50 |
| CANDELA | 1,900 | 200 |
| DISTANCE | 87m | 28m |
| RUN TIME | 2 hrs | 11 hrs |

| Description | Item # |
|---|---|
| Wedge XT - Includes USB-C cord, lanyard - Black | 88812 |
| Wedge XT - Includes USB-C cord, lanyard - Coyote | 88813 |
| Wedge XT - Includes USB-C cord, lanyard - Silver | 88819 |

| Size and Weight | Battery |
|---|---|
| 4.25" (10.8 cm); 2.62 oz (74.3g) | Lithium Polymer |



Charge indication LED:
Red – Charging; Green – Charged

Lithium polymer battery charges in 6 hours

## WEDGE®

**IPX7**

### Everyday carry flashlight available in multiple colors, making it easier to find in your toolbox

- Outfitted with an intuitive rotating thumb switch, providing tactile control over constant-on or THRO® modes
- Ergonomic design fits comfortably in your hand
- Grooved for a suregrip

|  | THRO | CONSTANT-ON |
|---|---|---|
| LUMENS | 1,000 | 300 |
| CANDELA | 3,000 | 1,200 |
| DISTANCE | 110m | 69m |
| RUN TIME | 35 sec | 3 hrs |



**NEW**

**1000 LUMENS**

| Description | Item # |
|---|---|
| Wedge - Includes USB-C cord, lanyard - Box - Black | 88810 |
| Wedge - Includes USB-C cord, lanyard - Box - Coyote | 88811 |
| Wedge - Includes USB-C cord, lanyard - Box - Red | 88814 |
| Wedge - Includes USB-C cord, lanyard - Box - Blue | 88817 |
| Wedge - Includes USB-C cord, lanyard - Box - Purple | 88818 |
| Wedge - Includes USB-C cord, lanyard - Box - Orange | 88820 |
| Wedge - Includes USB-C cord, lanyard - Box - Lime Green | 88821 |

| Size and Weight | Battery |
|---|---|
| 5.46" (13.87 cm); 3.3 oz (93.5g) | Lithium Polymer |



Battery charge indicator located in the on/off switch
**Charge indication:**

Red – Charging // Green – Charged
Recharges in 5 hours



Outfitted with intuitive rotating thumb switch providing tactile control over constant-on and THRO modes

# PROTAC® 1L-1AA

**IPX7**

## Ultra-compact, everyday carry flashlight

- TEN-TAP® Programmable
- Mutli-fuel - accepts multiple battery sources

| CR123A | HIGH | LOW |
|---|---|---|
| LUMENS | 350 | 40 |
| CANDELA | 6,400 | 720 |
| DISTANCE | 160m | 53m |
| RUN TIME | 1.5 hrs | 14 hrs |

Strobe runs 3 hours

| AA | HIGH | LOW |
|---|---|---|
| LUMENS | 150 | 40 |
| CANDELA | 2,750 | 720 |
| DISTANCE | 105m | 53m |
| RUN TIME  Alkaline | 1 hr 20 min | 7.5 hrs |
| RUN TIME  Lithium | 4.25 hrs | 14 hrs |

Strobe runs 3.5 hours (Alkaline) // 8 hours (Lithium)

| Description | Item # |
|---|---|
| ProTac 1L-1AA - Includes (1) AA alkaline and CR123A lithium batteries - Black | 88061 |
| ProTac 1L-1AA - Includes (1) AA alkaline and CR123A lithium batteries - Coyote | 88073 |

| Size and Weight | Battery |
|---|---|
| 4.25" (10.8 cm); 2.5 oz (71g) | (1) CR123A lithium or (1) AA alkaline; also accepts AA lithium |

# PROTAC® 2.0

**IP67**

## High-performance light that produces 2,000 lumens without sacrificing run time

- TEN-TAP® Programmable
- Durable anodized machined aircraft aluminum construction
- Battery recharges inside the light

| | HIGH | MEDIUM | LOW |
|---|---|---|---|
| LUMENS | 2,000 | 570 | 100 |
| CANDELA | 17,300 | 5,000 | 890 |
| DISTANCE | 262m | 142m | 60m |
| RUN TIME | 2.5 hrs | 4.5 hrs | 25 hrs |

Strobe runs 4 hours 25 minutes

**2000 LUMENS**

Slide sleeve back to access USB-C port.

SL-B50 battery pack charges in 6 hours.

| Description | Item # |
|---|---|
| ProTac 2.0 - Includes (1) SL-B50 battery pack, USB-C cord and nylon holster - Black | 89000 |

| Size and Weight | Battery |
|---|---|
| 6.1" (15.49 cm); 8.25 oz (234g) | (1) SL-B50 battery pack |

## PROTAC® 2L

**IPX7**

A compact and lightweight tactical light

- TEN-TAP® Programmable
- Maximum light output throughout battery life
- Push-button tail switch for momentary or constant on operation

|  | HIGH | LOW |
|---|---|---|
| LUMENS | 350 | 30 |
| CANDELA | 6,300 | 600 |
| DISTANCE | 159m | 49m |
| RUN TIME | 3.25 hrs | 35 hrs |

Strobe runs 6 hours

| Description | Item # |
|---|---|
| ProTac 2L - Includes (2) lithium batteries and holster - Black | 88031 |

| Size and Weight | Battery |
|---|---|
| 4.77" (12.12 cm); 2.8 oz. (79g) | (2) CR123A lithium batteries |

## PROTAC® HL

**IPX7**

A tactical flashlight that produces a high-lumen beam

- TEN-TAP® Programmable
- Pocket clip for convenience
- Anti roll head design

|  | HIGH | LOW |
|---|---|---|
| LUMENS | 750 | 35 |
| CANDELA | 18,300 | 900 |
| DISTANCE | 270m | 60m |
| RUN TIME | 1.25 hrs | 18 hrs |

Strobe runs 2.5 hours

| Description | Item # |
|---|---|
| ProTac HL - Includes (2) lithium batteries and holster - Black | 88040 |

| Size and Weight | Battery |
|---|---|
| 5.4" (13.7 cm); 5.6 oz. (158g) | (2) CR123A lithium batteries |

## PROTAC® 2L-X

**IPX7**

Multi-fuel tactical light

- Multi-battery versatility
- Push-button tail switch for momentary or constant on operation
- Pocket clip for convenience

|  | HIGH | LOW |
|---|---|---|
| LUMENS | 500 | 40 |
| CANDELA | 6,800 | 600 |
| DISTANCE | 165m | 49m |
| RUN TIME CR123A | 2.75 hrs | 30 hrs |
| RUN TIME SL-B26 | 3.25 hrs | 30 hrs |

Strobe runs 3.25 hours (CR123A) // 4.5 hours (SL-B26)

| Description | Item # |
|---|---|
| ProTac 2L-X - Includes (2) CR123A lithium batteries and holster - Clam - Black | 88062 |
| ProTac 2L-X - Includes (2) CR123A lithium batteries and holster - Box - Black | 88063 |
| ProTac 2L-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Clam - Black | 88082 |
| ProTac 2L-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Box - Black | 88083 |

| Size and Weight | Battery |
|---|---|
| 5.14" (13 cm); SL-B26: 4.4 oz (125g) // CR123A: 3.9 oz (111g) | (1) SL-B26 battery pack or (2) CR123A lithium batteries |

# PROTAC® 2AA-X

**IPX7**

Multi-fuel, personal carry tactical flashlight

- TEN-TAP® Programmable
- About the size of a marker, it conveniently fits in your pocket
- Multi-function, push-button tail switch

| Lithium Polymer | HIGH | LOW |
|---|---|---|
| LUMENS | 550 | 40 |
| CANDELA | 10,250 | 740 |
| DISTANCE | 203m | 54m |
| RUN TIME | 2.25 hrs | 16 hrs |

Strobe runs 4.5 hours

| AA | HIGH | LOW |
|---|---|---|
| LUMENS | 270 | 18 |
| CANDELA | 5,000 | 400 |
| DISTANCE | 141m | 40m |
| RUN TIME | 2.5 hrs | 48 hrs |

Strobe runs 5 hours

| Description | Item # |
|---|---|
| ProTac 2AA-X USB - Includes lithium polymer battery pack, USB-C cord and holster - Black | 88135 |
| ProTac 2AA-X USB - Includes lithium polymer battery pack, USB-C cord and holster - Coyote | 88137 |
| ProTac 2AA-X - Includes (2) AA alkaline batteries and holster - Black | 88033 |
| ProTac 2AA-X - Includes (2) AA alkaline batteries and holster - Coyote | 88072 |

| Size and Weight | Battery |
|---|---|
| 6" (15.3 cm); 3.5 oz (99g) | Lithium Polymer USB rechargeable battery or (2) AA alkaline |

# PROTAC® HL-X

**IP68**

Multi-fuel flashlight produces a high-lumen beam

- TEN-TAP® Programmable
- Pocket clip for convenience
- Anti-roll head design

|  | HIGH | MEDIUM | LOW |
|---|---|---|---|
| **LUMENS** | 1,000 | 400 | 65 |
| **CANDELA** | 27,100 | 10,000 | 1,600 |
| **DISTANCE** | 330m | 200m | 80m |
| **RUN TIME** CR123A | 1.25 hrs | 3 hrs | 20 hrs |
| **RUN TIME** SL-B26 | 1.5 hrs | 3.5 hrs | 23 hrs |

Strobe runs 2.5 hours (CR123A) // 3.25 hours (SL-B26)

| Description | Item # | COO | TAA | NSN/MCN |
|---|---|---|---|---|
| ProTac HL-X - Includes (2) CR123A lithium batteries and holster - Box - Black | 95313 | US | YES | 6230-01-626-6796 |
| ProTac HL-X - Includes (2) CR123A lithium batteries and holster - Clam - Black | 88064 | --- | -- | --- |
| ProTac HL-X - Includes (2) CR123A lithium batteries and holster - Box - Black | 88065 | --- | --- | --- |
| ProTac HL-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Box - Black | 95314 | US | YES | --- |
| ProTac HL-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Clam - Black | 88084 | --- | --- | --- |
| ProTac HL-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Box - Black | 88085 | --- | --- | -- |

| Size and Weight | Battery |
|---|---|
| 5.43" (13.8 cm); SL-B26: 6.2 oz (176g) // CR123A: 5.7 oz (162g) | (1) SL-B26 battery pack or (2) CR123A lithium batteries |

**1000 LUMENS**

# PROTAC® 90X

**IPX7**

Multi-fuel, everyday carry light with a twist

- Features a right angle head that gives extra lighting capability
- TEN-TAP® Programmable
- Carry in your hand, attach to belt, harnesses or other gear

|  | HIGH | MEDIUM | LOW |
|---|---|---|---|
| **LUMENS** | 1,000 | 300 | 65 |
| **CANDELA** | 7,350 | 2,060 | 450 |
| **DISTANCE** | 171m | 91m | 42m |
| **RUN TIME** CR123A | 2.5 hrs | 4 hrs | 21 hrs |
| **RUN TIME** SL-B26 | 1.75 hrs | 4.75 hrs | 24 hrs |

Strobe runs 2.5 hours (CR123A) // 3.5 hours (SL-B26)

**1000 LUMENS**

| Description | Item # |
|---|---|
| ProTac 90X - Includes (2) CR123A lithium batteries and holster - Black | 88094 |
| ProTac 90X USB - Includes (1) SL-B26 battery pack and holster - Black | 88095 |

| Size and Weight | Battery |
|---|---|
| 4.39" (11.1 cm); SL-B26: 4.9 oz (139g) // CR123A: 4.4 oz (125g) | (1) SL-B26 battery pack or (2) CR123A lithium batteries |

## PROTAC HL® 6

IPX7

Full-size, heavy duty flashlight is a powerhouse of illumination with 2 hours of run time

- TEN-TAP® Programmable
- Recharges in 5 hours
- Sure grip rubber sleeve provides thermal insulation

|  | HIGH | MEDIUM | LOW |
|---|---|---|---|
| LUMENS | 5,300 | 1,500 | 450 |
| CANDELA | 80,000 | 23,000 | 6,700 |
| DISTANCE | 566m | 303m | 164m |
| RUN TIME | 2 hrs | 3.75 hrs | 12.5 hrs |

Strobe runs 4 hours

| Description | Item # |
|---|---|
| ProTac HL 6 - Includes 120V AC Adapter, (2) SL-B48 battery packs, "Y" USB-C cord and wrist lanyard - Black | 88131 |
| ProTac HL 6 - Includes (2) SL-B48 battery packs, "Y" USB-C cord and wrist lanyard - Black | 88132 |

| Size and Weight | Battery |
|---|---|
| 10.5" (26.6 cm); 1.3 lbs (590g) | (2) SL-B48 battery pack |

5300 LUMENS

# PROTAC HL® 5-X

**IPX7**

Super-bright, heavy-duty multi-fuel flashlight

- Features a sure grip rubber sleeve
- Includes lanyard to ensure you'll never lose your grip
- TEN-TAP® Programmable

| Description | Item # |
|---|---|
| ProTac HL 5-X - Includes (4) CR123A lithium batteries and wrist lanyard - Box - Black | 88074 |
| ProTac HL 5-X - Includes (4) CR123A lithium batteries and wrist lanyard - Box - Black - Black | 88075 |
| ProTac HL 5-X USB - Includes (2) SL-B26 battery packs, "Y" USB cord and lanyard - Clam - Black | 88080 |
| ProTac HL 5-X USB - Includes (2) SL-B26 battery packs, "Y" USB Cord, and wrist lanyard - Box - Black | 88081 |

| Size and Weight | Battery |
|---|---|
| 9.53" (23.65 cm); SL-B26: 1 lb 3.4 oz (522g) // CR123A: 1lb 2.4 oz (550g) | (4) CR123A lithium batteries or (2) SL-B26 battery packs |

| SL-B26 | HIGH | MEDIUM | LOW |
|---|---|---|---|
| LUMENS | 3,500 | 1,000 | 250 |
| CANDELA | 51,000 | 14,100 | 3,620 |
| DISTANCE | 452m | 237m | 120m |
| RUN TIME | 1.25 hrs | 3 hrs | 11.5 hrs |

Strobe runs 1.25 hours

| CR123A | HIGH | MEDIUM | LOW |
|---|---|---|---|
| LUMENS | 2,500 | 1,000 | 250 |
| CANDELA | 37,000 | 14,100 | 3,620 |
| DISTANCE | 385m | 237m | 120m |
| RUN TIME | 1.5 hrs | 2.5 hrs | 10.5 hrs |

Strobe runs 1.5 hours



**3500 LUMENS**

## PROTAC HPL® USB

High performance, high-lumen hand held flashlight

- Self-adjusting battery cradle secures multiple battery sizes and eliminates battery rattle
- USB rechargeable (battery charges in the light)
- TEN-TAP® Programmable

|  | HIGH | MEDIUM | LOW |
|---|---|---|---|
| LUMENS | 1,000 | 400 | 65 |
| CANDELA | 35,000 | 14,100 | 2,250 |
| DISTANCE | 374m | 237m | 95m |
| RUN TIME | 1.5 hrs | 3.5 hrs | 24 hrs |

Strobe runs 3 hours

**1000** LUMENS    35,000 cd

| Description | Item # |
|---|---|
| ProTac HPL USB - Includes lithium-ion battery, USB cord and holster - Clam - Black | 88076 |
| ProTac HPL USB - Includes lithium-ion battery, USB cord and holster - Box - Black | 88077 |

| Size and Weight | Battery |
|---|---|
| 7.08" (18 cm); 9.24 oz (262g) | Lithium-ion (#74175), also accepts SL-B26 battery pack or (2) CR123A lithium batteries |

## PROTAC HL® USB

High-lumen, USB rechargeable tactical light

- Self-adjusting battery cradle secures multiple battery sizes and eliminates battery rattle
- TEN-TAP® Programmable

|  | HIGH | MEDIUM | LOW |
|---|---|---|---|
| LUMENS | 1,000 | 380 | 65 |
| CANDELA | 12,000 | 4,420 | 700 |
| DISTANCE | 219m | 133m | 53m |
| RUN TIME | 1.5 hrs | 3.5 hrs | 23 hrs |

Strobe runs 1.5 hours

**1000** LUMENS

| Description | Item # |
|---|---|
| ProTac HL USB - 120V AC/12V DC & holster - Black | 88054 |
| ProTac HL USB - Includes USB cord - Black | 88052 |

| Size and Weight | Battery |
|---|---|
| 6.5" (16.5 cm); 7.2 oz (204g) | Lithium-ion battery - uses the same battery (#74175) as the Strion; also SL-B26 Li-Ion USB rechargeable battery packs or (2) CR123A lithium |

# SL-B26® PROTECTED LITHIUM-ION USB RECHARGEABLE BATTERY PACK

The battery that transforms multi-fuel, high performance lighting tools into rechargeable systems

- Features USB-C input and charge status indicators; recharges in 5 hours
- Integrated safety circuit protects battery from overcharge
- Charge via USB source or optional charge cradle

| Description | Item # |
|---|---|
| SL-B26 Li-Ion USB Rechargeable Battery Pack - 1pk | 22101 |
| SL-B26 Li-Ion USB Rechargeable Battery Pack - 2pk | 22102 |
| SL-B26 Li-Ion USB Rechargeable Battery Pack - 2pk - Box | 22104 |
| SL-B26 Li-Ion USB Rechargeable Battery Pack - 8pk | 22105 |
| Li-Ion Charge Cradle | 22100 |
| Li-ion Rechargeable Battery Kit - Includes USB cord and (2) SL-B26 battery packs | 22010 |
| Li-Ion Battery Pack Kit - 120V AC - Includes (2) SL-B26 battery packs | 22011 |
| 22" (55.88 cm) USB-C Cord | 22084 |
| 40" (101.6) USB-C Cord | 22091 |
| 22" (55.88 cm) Micro USB Cord - For use with charge cradle | 22070 |
| 40" (101.6) Micro USB Cord - For use with charge cradle | 22081 |

| Size and Weight | Battery |
|---|---|
| Battery: 2.75" (7 cm); 1.7 oz (48g)<br>Cradle: 4.5" (11.4 cm); 2.4 oz (68g) | 2600mAh SL-B26 protected<br>Li-Ion USB rechargeable battery pack |
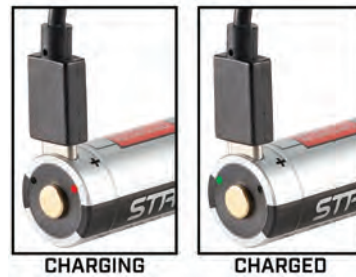
# EIGHT-UNIT SL-B26® BANK CHARGER

Charge up to eight batteries with Streamlight's lithium-ion bank charger

- Charge indicators over each battery; recharges in 5.25 hours
- Each charge bay securely holds the battery in place
- Ideal for mounting on trucks; 1" (2.54 cm) low profile housing

| Description | Item # |
|---|---|
| 8-Unit Bank Charger - 12V DC - batteries not included | 20220 |
| 8-Unit Bank Charger - 120V/100V AC- batteries not included | 20221 |
| 8-Unit Bank Charger - 12V DC - Includes (8) SL-B26 batteries | 20223 |
| 8-Unit Bank Charger - 120V/100V AC - Includes (8) SL-B26 batteries | 20224 |
| 120V AC Cord | 44909 |
| 12V DC Cord | 44923 |

**NFPA** Meets requirements of NFPA 1900-11.1.11.2 (2024); mounted in upright position

| Size and Weight |
|---|
| 10.45 x 4.74 x 1 in (26.54 x 12.06 x 2.54 cm)<br>7.6 oz (216g) with batteries // 20.88 oz (592g) without batteries |

# SL-B50® PROTECTED LITHIUM-ION USB RECHARGEABLE BATTERY PACK

The battery that was designed for select Streamlight products

- Features USB-C input and charge status indicators; recharges in 6 hours
- Integrated safety circuit protects battery from overcharge

| Description | Item # |
|---|---|
| SL-B50 Li-Ion USB rechargeable battery pack - 1pk | 22111 |
| SL-B50 Li-Ion USB rechargeable battery pack - 2pk | 22112 |
| 22" (55.88 cm) USB-C Cord | 22084 |

| Size and Weight | Battery |
|---|---|
| 3.26" (8.28 cm); 3 oz (85g) | 4900mAh SL-B26 protected Li-Ion USB rechargeable battery pack |



CHARGING     CHARGED

# WORKS WITH:



ProTac® 2.0 Headlamp

ProTac® 2.0 Handheld

ProTac® 2.0 Rail Mount

ProTac® 2.0 Rail Mount HP

# POLYTAC® X

**IPX7**

### Rugged, multi-fuel flashlight with polymer construction

- High-impact, super-tough nylon polymer with "rocky stipple" texture for a sure grip
- TEN-TAP® Programmable
- Removable, multi-position pocket clip

|                 | HIGH    | MEDIUM  | LOW    |
|-----------------|---------|---------|--------|
| LUMENS          | 600     | 260     | 35     |
| CANDELA         | 11,485  | 4,930   | 675    |
| DISTANCE        | 205m    | 135m    | 50m    |
| RUN TIME CR123A | 2.75 hrs| 5.5 hrs | 34 hrs |
| RUN TIME SL-B26 | 3.5 hrs | 5.75 hrs| 36 hrs |

Strobe runs 5.5 hours (CR123A) // 8 hours (SL-B26)

**NFPA**
Flashlight meets 500°F requirements of NFPA 1971-8.6 (2018)

| Description | CLAM | BOX | COO | TAA | NSN/MCN |
|-------------|------|-----|-----|-----|---------|
| PolyTac X - Includes (2) CR123A lithium batteries - Black | 88600 | 88603 | US | YES | -- |
| PolyTac X - Includes (2) CR123A lithium batteries - Yellow | 88601 | 88604 | US | YES | -- |
| PolyTac X - Includes (2) CR123A lithium batteries - Coyote | 88602 | 88605 | US | YES | -- |
| PolyTac X USB - Includes SL-B26 battery pack and USB cord - Black | 88610 | 88613 | US | YES | Clam - 6230-01-690-0331 Box - 6230-01-692-9761 |
| PolyTac X USB - Includes SL-B26 battery pack and USB cord - Yellow | 88611 | 88614 | -- | -- | -- |
| PolyTac X USB - Includes SL-B26 battery pack and USB cord - Coyote | 88612 | 88615 | -- | -- | -- |

| Size and Weight | Battery |
|-----------------|---------|
| 5.46" (13.87 cm); SL-B26: 4.9 oz (139g) // CR123A: 4.4 oz (125g) | SL-B26 battery pack or (2) CR123A lithium batteries |

| DESCRIPTION | ITEM # | PROTAC 1L-1AA | PROTAC 2AA-X | PROTAC 2.0 | PROTAC 2L | PROTAC 2L-X | PROTAC HL | PROTAC HL-X | PROTAC HPL | PROTAC HL 5-X | PROTAC HL 6 | POLYTAC X |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| CR123A Lithium-ion Batteries - 2pk | 85175 | √ | | | √ | √ | √ | √ | √ | √ | | √ |
| CR123A Lithium-ion Batteries - 6pk | 85180 | √ | | | √ | √ | √ | √ | √ | √ | | √ |
| CR123A Lithium-ion Batteries - 12pk | 85177 | √ | | | √ | √ | √ | √ | √ | √ | | √ |
| CR123A Lithium-ion Batteries - 400pk | 85179 | √ | | | √ | √ | √ | √ | √ | √ | | √ |
| SL-B26 Battery Pack - 1pk | 22101 | | | | | √ | √ | √ | √ | √ | | √ |
| SL-B50 Battery Pack - 1pk | 22111 | | | √ | | | | | | | | |
| SL-B50 Battery Pack - 2pk | 22112 | | | √ | | | | | | | | |
| SLB-48 Battery Pack | 88133 | | | | | | | | | | √ | |
| Lithium Polymer Battery Pack | 88136 | | √ | | | | | | | | | |
| 22" (55.88 cm) USB-C Cord | 22084 | | √ | √ | | √ | | √ | | | | √ |
| "Y" USB-C Cord | 22090 | | | | | | | | | √ | √ | |
| Nylon Holster | 88037 | √ | | | | | | | | | | |
| Nylon Holster | 88036 | | | √ | | | | | | | | |
| Nylon Holster | 88038 | | √ | | | | | | | | | |
| Nylon Holster | 88043 | | | | | | √ | | | | | |
| Nylon Holster | 88086 | | | √ | | | | | | | | |
| Nylon Holster | 85905 | | | | | | | | | | | √ |
| Nylon Holster | 85909 | | | | | | | | | | | √ |
| Tactical Holster | 88051 | | | | | | √ | | | | | |
| Helmet Mount | 68085 | | | | | | | | | | | √ |
| Flip Lens - Red | 88115 | | | | | | | | | | | √ |
| Flip Lens - Blue | 85116 | | | | | | | | | | | √ |
| Flip Lens - Green | 85117 | | | | | | | | | | | √ |
| Flip Lens - IR | 74039 | | | | | | | | | | | √ |
| Safety Wand | 88057 | | | √ | | | √ | √ | | | | |
| Rubber Helmet Strap | 99075 | | | | | | | | | | | √ |

85175, 85180, 85177, 85179

22101

22111, 22112

88133

88136

22084

22090

88038, 88043, 88086

85905

85909

88051

680851

88037, 88036

88115, 88116, 88117, 74039

88075

99075

## STRION LED HL® // STRION® DS HL

**IPX4**

Rechargeable, high-lumen professional flashlight ideal for searching a large area

- Anti-roll ring included
- TEN-TAP® Programming
- DS model features dual switch capability

| STRION DS HL | HIGH | MEDIUM | LOW |
|---|---|---|---|
| LUMENS | 700 | 300 | 40 |
| CANDELA | 12,000 | 5,000 | 800 |
| DISTANCE | 219m | 141m | 57m |
| RUN TIME | 1.25 hrs | 3.5 hrs | 24 hrs |

Strobe runs 2.5 hours

| STRION LED HL | HIGH | MEDIUM | LOW |
|---|---|---|---|
| LUMENS | 615 | 320 | 160 |
| CANDELA | 12,000 | 6,000 | 3,000 |
| DISTANCE | 219m | 155m | 110m |
| RUN TIME | 1.25 hrs | 2.5 hrs | 4.5 hrs |

Strobe runs 3 hours

| Description | Item # |
|---|---|
| Strion DS HL - 120V/12V DC - 2 holders - Black | 74612 |
| Strion LED HL - 120V AC/12V DC - 2 Holders - Black | 74752 |

| Size and Weight | Battery |
|---|---|
| DS HL: 6.33" (16.08 cm); 5.4 oz (153g) // LED HL: 5.9" (14.99 cm); 5.2 oz (148g) | Lithium-ion |

## STRION® LED // STRION® DS

**IPX4**

Compact, professional light designed for the broadest range of lighting needs at the best value

- Bright, far-reaching beam with ample peripheral light with long run times
- TEN-TAP® Programming
- DS model features dual switch capability

| STRION DS | HIGH | MEDIUM | LOW |
|---|---|---|---|
| LUMENS | 375 | 150 | 40 |
| CANDELA | 12,000 | 5,000 | 1,300 |
| DISTANCE | 219m | 141m | 72m |
| RUN TIME | 2.5 hrs | 6.25 hrs | 24 hrs |

Strobe runs 5 hours

| STRION LED | HIGH | MEDIUM | LOW |
|---|---|---|---|
| LUMENS | 375 | 175 | 80 |
| CANDELA | 12,000 | 6,500 | 3,200 |
| DISTANCE | 219m | 161m | 113m |
| RUN TIME | 2.5 hrs | 4.75 hrs | 9.5 hrs |

Strobe runs 6.5 hours

| Description | Item # | NSN/MCN |
|---|---|---|
| Strion LED - 120V AC/12V DC - 1 Holder - Black | 74301 | --- |
| Strion LED - 230V AC/12V DC - 1 Holder - Black | 74311 | 6230-01-595-1946 |
| Strion DS - 120V AC/12V DC - 1 Holder - Black | 74411 | --- |

| Size and Weight | Battery |
|---|---|
| LED: 5.9" (14.99 cm); 5.2 oz (148g) // DS: 6.4" (16.26 cm); 5.4 oz. (153g) | Lithium-ion |

# STRION® 2020

**1,200 LUMENS | MODE SELECT SWITCH: HIGH, MEDIUM, LOW | RECHARGEABLE BATTERY**

## STRION® 2020

**IPX7**

Compact, rechargeable flashlight that features independently functioning head and tail switches

- Intuitive mode selector switch for ease of use
- Works with existing Strion series chargers; recharges in 4.5 hours
- PiggyBack® charger option available

|  | HIGH | MEDIUM | LOW |
|---|---|---|---|
| LUMENS | 1,200 | 460 | 120 |
| CANDELA | 28,000 | 10,000 | 3,000 |
| DISTANCE | 335m | 200m | 110m |
| RUN TIME | 1.75 hrs | 5.5 hrs | 12 hrs |

Strobe runs 3.5 hours

| Description | Item # |
|---|---|
| Strion 2020 - 120V AC/12V DC | 74431 |
| Strion 2020 - 230V/12V DC | 74432 |
| Strion 2020 - 12V DC | 74434 |
| Strion 2020 - Without Charger | 74435 |

| Size and Weight | Battery |
|---|---|
| 6.33" (16.1 cm); 5.7 oz (161.1g) | Lithium-ion |

Battery status indicator:
Green = Charged
Red = Needs to be Charged

**1200 LUMENS**

## STRION ACCESSORIES

| DESCRIPTION | ITEM # | STRION LED HL / STRION DS LED HL | STRION HPL/ STRION DS HPL | STRION LED / STRION DS | STRION 2020 |
|---|---|---|---|---|---|
| 6-Unit Bank Charger - 120V | 74400 | √ | √ | √ | √ |
| 6-Unit Bank Charger - 12V DC | 74401 | √ | √ | √ | √ |
| PiggyBack® Charger | 74115 | √ | √ | √ | √ |
| Charger Holder | 74102 | √ | √ | √ | √ |
| Lithium-ion Battery | 74436 | √ | √ | √ | √ |
| Li-ion Battery Stick | 74175 | √ | √ | √ | √ |
| 12V DC1 Charge Cord | 22051 | √ | √ | √ | √ |
| 12V DC2 Charge Cord | 22050 | √ | √ | √ | √ |
| 120V AC Charge Cord | 22071 | √ | √ | √ | √ |
| Rail Mount | 74200 | √ | √ | √ | √ |
| Vertical Grip | 69114 | √ | √ | √ | √ |
| Leather Plain Holster | 74059 | √ | | √ | √ |
| Leather Weave Holster | 74060 | √ | | √ | √ |
| Nylon Holster | 85905 | √ | | √ | √ |
| Tactical Holster | 88051 | √ | √ | √ | √ |
| Red Flip Lens | 85115 | √ | | √ | √ |
| Green Flip Lens | 85117 | √ | | √ | √ |
| Blue Flip Lens | 85116 | √ | | √ | √ |
| Red Wand | 74903 | √ | | √ | √ |
| Red Wand | 75946 | | √ | | |
| Yellow Wand | 74904 | √ | | √ | √ |
| Yellow Wand | 75948 | | √ | | |
| Glow in the Dark Wand | 74913 | √ | | √ | √ |
| Glow in the Dark Wand | 75950 | | √ | | |



74401



74115



74102



74436



74175



22051



22050



22071



74200



69114



74059



74060



85905



88051



85115, 85117, 85116



74904, 75946



74904, 75948



74913, 75050

# STINGER® 2020

**IPX7**

Rechargeable, high-lumen flashlight with
mode selector switch

- Dual power switches and intuitive mode selector switch for ease of use
- Multiple charging options; recharges in 8 hours
- Anti-roll design

**2000 LUMENS**



|  | HIGH | MEDIUM | LOW |
|---|---|---|---|
| LUMENS | 2,000 | 850 | 100 |
| CANDELA | 25,000 | 10,000 | 1,200 |
| DISTANCE | 315m | 200m | 70m |
| RUN TIME | 2 hrs | 4 hrs | 24 hrs |

Strobe runs 3.25 hours

| Description | Item # | COO | TAA |
|---|---|---|---|
| Stinger 2020 - Light Only - Includes "Y" USB cord - Black | 78100 | US | YES |
| Stinger 2020 - 120V/12V DC - 1 holder - Black | 78101 | US | YES |
| Stinger 2020 - 230V/12V DC - 1 holder - Black | 78102 | US | YES |
| Stinger 2020 - 240V/12V DC - 1 holder - Black | 78103 | US | YES |
| Stinger 2020 - 12V DC - 1 holder - Black | 78104 | US | YES |

| Size and Weight | Battery |
|---|---|
| 7.67" (19.48 cm); 12.3 oz (350g) | (2) SL-B26 battery packs |



Mode switch for easy selection of
High, Medium or Low

# STINGER LED HL® // STINGER DS LED HL®

**IPX4**

## High-lumen flashlight provides intense illumination

- Wide beam pattern gives you a bright flood light
- High, medium, low and strobe modes; recharges in 4.5 hours
- DS model provides both a tailcap and head switch

|  | HIGH | MEDIUM | LOW |
|---|---|---|---|
| **LUMENS** | 800 | 400 | 200 |
| **CANDELA** | 24,000 | 12,000 | 6,000 |
| **DISTANCE** | 310m | 219m | 155m |
| **RUN TIME** | 1.5 hrs | 2.5 hrs | 5 hrs |

Strobe runs 3 hours

| Description | Item # | NSN/MCN | COO | TAA |
|---|---|---|---|---|
| Stinger LED HL - Light Only - Black | 95301 |  | US | YES |
| Stinger DS LED HL - 120V AC/12V DC - Black | 95302 | 6230-01-413-5270 | US | YES |

| Size and Weight | Battery |
|---|---|
| LED HL: 8.41" (21.36 cm); 12.4 oz (352g) // DS LED HL: 8.85" (22.48 cm); 12.8 oz (364g) | NiMH |



# STINGER® LED // STINGER DS® LED

**IPX4**

## All-purpose lighting tool designed for the broadest range of lighting needs

- Recharges within 4.5 hours
- Multiple lighting modes: high, medium, low and strobe
- The DS model provides both a tailcap and head switch

|  | HIGH | MEDIUM | LOW |
|---|---|---|---|
| **LUMENS** | 425 | 200 | 100 |
| **CANDELA** | 26,000 | 12,000 | 6,000 |
| **DISTANCE** | 322m | 219m | 155m |
| **RUN TIME** | 3 hrs | 5.5 hrs | 10 hrs |

Strobe runs 7.5 hours

| Description | Item # | COO | TAA | NSN/MCN |
|---|---|---|---|---|
| Stinger LED - 120V AC/12V DC - Black | 95304 | US | YES | --- |
| Stinger LED - 230V AC/12V DC - Black | 95307 | US | YES | --- |
| Stinger LED - 12V DC - Black | 95303 | US | YES | 6230-01-628-6642 |
| Stinger DS LED - 120V AC/12V DC - Black | 95306 | US | YES | --- |
| Stinger DS LED - 12V DC - Black | 95305 | US | YES | 6230-01-492-9009 |

| Size and Weight | Battery |
|---|---|
| LED: 8.41" (21.36 cm); 12.4 oz. (352g) // DS LED: 8.85" (22.48 cm); 12.8oz (364g) | NiMH |

# STINGER® COLOR-RITE®

**IPX4**

Rechargeable flashlight featuring Streamlight's Color-Rite Technology®

- Provides warm white light that produces a natural balance of color
- 90 CRI LED for true color recognition of wire colors, paint and fine details
- Multi-function, push button switch: high, medium, low or strobe

|  | HIGH | MEDIUM | LOW |
|---|---|---|---|
| LUMENS | 500 | 275 | 140 |
| CANDELA | 17,500 | 9,000 | 4,500 |
| DISTANCE | 265m | 190m | 134m |
| RUN TIME | 1.5 hrs | 2.5 hrs | 5 hrs |

Strobe runs 3 hours / Color Temperature: 3,000k

| Description | Item # | COO | TAA |
|---|---|---|---|
| Stinger Color-Rite - 120V AC/12V DC PiggyBack - Black | 75496 | US | YES |
| Stinger Color-Rite - Light Only - Black | 75497 | US | YES |

| Size and Weight | Battery |
|---|---|
| 8.41" (21.36 cm); 12.4 oz (352g) | NiMH |

**Color-Rite®**

## STINGER ACCESSORIES

| DESCRIPTION | ITEM # | STINGER 2020 | STINGER COLOR-RITE | STINGER LED HL // DS LED HL | STINGER LED //DS LED |
|---|---|---|---|---|---|
| 5-Unit Bank Charger | 75400 | √ | √ | √ | √ |
| Smart Charger | 75105 | √ | √ | √ | √ |
| Smart PiggyBack® Charger | 75277 | | √ | √ | √ |
| Li-Ion Battery Stick | 75176 | | √ | √ | √ |
| NiMH Battery Stick | 75375 | | √ | √ | √ |
| SL-B26 Battery Pack | 78105 | √ | | | |
| 12V DC1 Charge Cord | 22051 | √ | √ | √ | √ |
| 12V DC2 Charge Cord | 22050 | √ | √ | √ | √ |
| 120V AC Charge Cord | 22071 | √ | √ | √ | √ |
| "Y" USB Cord | 22082 | √ | | | |
| Leather Plain Holster | 75133 | | √ | √ | √ |
| Leather Weave Holster | 78114 | √ | | | |
| Leather Weave Holster | 75134 | | | √ | √ |
| Nylon Holster | 75927 | | √ | √ | √ |
| Nylon Holster | 78107 | √ | | | |
| Loop Nylon Holster | 75928 | | √ | √ | √ |
| Duty Holster | 88053 | | √ | √ | √ |
| Ring Holder | 75906 | | √ | √ | √ |
| Facecap Ring Kit | 78113 | √ | | | |
| Red Flip Lens | 75115 | √ | √ | √ | √ |
| Blue Flip Lens | 75116 | √ | √ | √ | √ |
| Green Flip Lens | 75117 | √ | √ | √ | √ |
| Red Wand | 75903 | √ | √ | √ | √ |
| White Wand | 75908 | √ | √ | √ | √ |
| Blue Wand | 75902 | √ | √ | √ | √ |
| Yellow Wand | 75904 | √ | √ | √ | √ |
| Glow in the Dark Wand | 75913 | √ | √ | √ | √ |

75400

75105

75277

75176

75375

78105

22051

22050

22071

22082

75133

78114, 75134

75927, 78107

75928

88053

75906

78113

75115

75116

75117

75903

75908

75902

75904

75913

# // COLOR-RITE TECHNOLOGY®

## // WHAT IS COLOR-RITE TECHNOLOGY?

Color-Rite Technology is based on the Color Rendering Index (CRI) -- a scale from 0-100 that indicates how a light source reflects color variations as they appear to the human eye. The higher the CRI, the more vibrant the colors appear. On the scale, lights that measure 90+ are considered "high" CRI lights and are critical for tasks requiring the most accurate color discrimination. A perfect 100 would enable us to see colors as they appear in natural sunlight.

## // WHY STREAMLIGHT COLOR-RITE TECHNOLOGY?

Flashlights equipped with Streamlight's proprietary Color-Rite Technology allow users to see the color spectrum as they would in natural light. While a standard high-lumen LED light produces an ultra-bright white beam that is needed in many applications, it prevents seeing subtle color differences in, for example, auto body paint colors or electrical wiring. In contrast, a high CRI light provides a softer, warmer beam to prevent color "washout," allowing the user to see specific colors or imperfections and subtle details, regardless of the task.

## // COLOR-RITE® APPLICATIONS FOR EVERY SITUATION

Streamlight offers a family of Color-Rite® lights for situations that require detailed inspections or color differentiation. For markets as diverse as automotive, industrial, law enforcement, military and even outdoor recreation, we have developed high CRI lights with Color-Rite Technology® for a wide variety of tasks that require exacting attention to detail. From repairing electrical wires to inspecting paint finishes or examining forensic evidence, count on Streamlight's Color-Rite® products help get the job done efficiently and safely. Our family of Color-Rite® products include the following:

### STINGER® COLOR-RITE®

Rechargeable, warm white (3,000K)
90 CRI LED with Streamlight's Color-Rite Technology

### DUALIE® 3AA COLOR-RITE®

Intrinsically safe multi-function dual beam flashlight with a cool white LED and a warm white (4,000K) 90 CRI LED with Streamlight's Color-Rite Technology

### STINGER SWITCHBLADE®

Five lights in one:
Drop Light | Hands-Free | White Light |
Color-Rite Light (4,000K) | UV Light

### STRION SWITCHBLADE®

Five lights in one:
Drop Light | Hands-Free | White Light |
Color-Rite Light (4,000K) | UV Light

### SYCLONE®

Ultra-compact work light with a cool white LED and a warm white (4,000K) 90 CRI LED with Streamlight's Color-Rite Technology

### FLIPMATE®

Compact work light with cool white LEDs and warm white (4,000K) 90 CRI LEDs with Streamlight's Color-Rite Technology - each with high and low modes

## STINGER SWITCHBLADE®

**IPX4**

Rechargeable, 180° articulating, multi-function light bar

- Five Lights in One: droplight, hands-free light, bright white light, high CRI light with Streamlight's Color-Rite Technology® and UV light
- Smart Charger recharges in 6.25 hours or 5 hours with 12V DC input
- Ultra thin design fits in tight spaces and folds in half for storage

**Color-Rite®**



|  | COOL WHITE | HIGH CRI (90) | UV LED |
|---|---|---|---|
| **LUMENS** | 800 | 600 | 500 mW |
| **RUN TIME** | 3.75 hrs | 3.75 hrs | 15 hrs |

Color temperature: 4,000k

| Description | Item # |
|---|---|
| Stinger Switchblade - 120V/100V AC - 1 holder - Red | 76801 |
| Stinger Switchblade - Includes Micro-USB cord - Red | 76800 |

| Size and Weight | Battery |
|---|---|
| Folded: 9.8" (24.89 cm) // Extended: 17" (43.18 cm); 17.1 oz (485g) | Lithium-Ion |

# STRION SWITCHBLADE®

**IPX4**

Compact, rechargeable, 180° articulating, multi-function light bar

- Five Lights in One: droplight, hands-free light, bright white light, high CRI light with Streamlight's Color-Rite Technology® and UV light
- PiggyBack® charger option for extra battery, ready to replace and use whenever you need it
- Lithium-ion battery recharges in 4 hours

**Color-Rite®**

|  | COOL WHITE | HIGH CRI (90) | UV LED |
|---|---|---|---|
| **LUMENS** | 500 | 400 | 500 mW |
| **RUN TIME** | 3 hrs | 3 hrs | 5 hrs |

Color temperature: 4,000k

| Description | Item # |
|---|---|
| Strion Switchblade - Includes Micro-USB cord - Red | 74850 |
| Strion Switchblade - 120V AC - 1 holder - Red | 74851 |
| Strion Switchblade - 120V AC - PiggyBack® - Red | 74854 |

| Size and Weight | Battery |
|---|---|
| Folded: 6" (15.24 cm) // Extended: 10.75" (27.3 cm); 6.4 oz (181g) | Lithium-Ion |

## SYCLONE® JR.

**IPX4**

Ultra-compact work light with a cool white LED for everyday use

- Head swivels 360° to aim it where you need it, adjustable with one hand
- Multi-function, push-button switch with charge indicator - charges in 4.5 hours
- Go hands-free with the flat, magnetic base and stowable hook

|  | HIGH | LOW |
|---|---|---|
| LUMENS | 210 | 85 |
| DISTANCE | 79m | 49m |
| RUN TIME | 3.75 hrs | 8.5 hrs |

Hands-free applications:
1.) Magnetic base
2.) Stowable hang hook

| Description | Item # |
|---|---|
| Syclone Jr. - Includes USB cord - Red | 61530 |

| Size and Weight | Battery |
|---|---|
| 2.04" (5.18 cm); 2 oz (57g) | Lithium Polymer |

## SYCLONE®

**IPX4**

Compact, rechargeable work light with Color-Rite Technology®

- Cool white light and 90 CRI LED - each with high, medium and low modes
- Hands-free options with the flat, magnetic base and stowable hang hook
- Head swivels 360° to aim the beam

| spot/cool whitE | HIGH | MEDIUM | LOW |
|---|---|---|---|
| LUMENS | 400 | 200 | 100 |
| DISTANCE | 141m | 95m | 72m |
| RUN TIME | 2 hrs | 4.5 hrs | 9.5 hrs |

| Flood/90 CRI | HIGH | MEDIUM | LOW |
|---|---|---|---|
| LUMENS | 300 | 150 | 75 |
| DISTANCE | 48m | 35m | 24m |
| RUN TIME | 2 hrs | 4 hrs | 8 hrs |

Color Temperature 4,000K

**Color-Rite®**

| Description | Item # |
|---|---|
| Syclone - Includes USB cord - Red | 61510 |

| Size and Weight | Battery |
|---|---|
| 2.97" (7.54 cm); 5.3 oz (150g) | Lithium polymer |

# FLIPMATE®

**IPX4**

Color-Rite®

Work light featuring a 270° rotating light bar

- Double function light bar with 90 CRI LEDs and cool white LEDs
- Go hands-free with the magnetic base, stowable hang hook or flat, stable bottom for standing on its own
- USB rechargeable; recharges in 4.5 hours

|  | COOL WHITE | | 90 CRI | |
|---|---|---|---|---|
|  | HIGH | LOW | HIGH | LOW |
| LUMENS | 500 | 250 | 400 | 200 |
| RUN TIME | 4 hrs | 5.75 hrs | 4 hrs | 6 hrs |

Color Temperature 4,000k

| Description | Item # |
|---|---|
| FlipMate - Includes USB cord - Black | 61500 |
| FlipMate - Includes USB cord - Red | 61501 |
| FlipMate - Includes USB cord - Blue | 61502 |

| Size and Weight | Battery |
|---|---|
| Folded: 4.58" (11.63 cm) // Extended: 7.94" (20.17); 8.7 oz (247g) | Lithium-ion |

# BEARTRAP® 360

**IPX4**

Rechargeable work light with 360° rotating body that pivots 270°

- Produces bright white light in both spot and flood modes
- Go hands-free - clamp it, hang it or use its magnetic base
- Will continue to charge while plugged in and in use

**2000 LUMENS**

|  | SPOT | | | FLOOD | | |
|---|---|---|---|---|---|---|
|  | HIGH | MEDIUM | LOW | HIGH | MEDIUM | LOW |
| LUMENS | 1,000 | 450 | 325 | 2,000 | 1,000 | 575 |
| CANDELA | 7,500 | 3,600 | 2,500 | 1,200 | 680 | 360 |
| DISTANCE | 174m | 120m | 100m | 69m | 52m | 38m |
| RUN TIME | 4.5 hrs | 8.75 hrs | 12.5 hrs | 2.5 hrs | 5 hrs | 8.75 hrs |

| Description | Item # |
|---|---|
| BearTrap 360 - 120V/100V AC - Red | 61523 |
| 120V AC Cord | 44922 |
| 12V DC Cord | 44923 |
| Lithium-Ion Battery | 61522 |

| Size and Weight | Battery |
|---|---|
| 7.62" (19.35 cm); 2 lbs 5 oz (1049g) | Lithium-ion |

# SUPER SIEGE®

**IPX7**

**1100 LUMENS**

Rechargeable lantern provides 360° of bright light that illuminates an entire area

- Easy, large button for turning off and on
- Rechargeable
- Auxiliary charger charges portable devices
- Glare Guard™ will shield light from behind for up-close task lighting

| WHITE | HIGH | MEDIUM | LOW |
|---|---|---|---|
| LUMENS | 1,100 | 550 | 125 |
| RUN TIME | 5.75 hrs | 11.5 hrs | 36.25 hrs |

| RED | HIGH | SOS | LOW |
|---|---|---|---|
| LUMENS | 2.7 | 2.7 | 1 |
| RUN TIME | 140 hrs | 320 hrs | 348 hrs |

| Description | Item # |
|---|---|
| Super Siege - 120V AC - Coyote | 44947 |
| Super Siege - 120V AC - Yellow | 44945 |

| Size and Weight | Battery |
|---|---|
| 7.5" (19.05 cm); 1 lb 14 oz (867.62g) | Lithium-ion |



A small dry storage area is provided in the light's base for all your "keep dry" needs

## THE SIEGE®

**IPX7**

Lantern powerful enough to light up a campsite

- Runs over 30 hours on high and over 12 days on low
- Battery indicator that flashes when low battery
- Three white light settings, a red light for softer light and an SOS mode



| WHITE | HIGH | MEDIUM | LOW |
|---|---|---|---|
| LUMENS | 540 | 275 | 55 |
| RUN TIME | 30 hrs | 70 hrs | 295 hrs |

| RED | HIGH | SOS |
|---|---|---|
| LUMENS | 10 | 10 |
| RUN TIME | 235 hrs | 430 hrs |

| Description | Item # |
|---|---|
| The Siege - Coyote | 44931 |

| Size and Weight | Battery |
|---|---|
| 7.25" (18.41 cm); 1 lb 15 oz (878.83g) | (3) D Batteries |

## SIEGE® AA

**IPX7**

A rugged, compact lantern for when you need a lot of light without taking up a lot of space

- One white LED and two red LEDs
- Five output modes
- Battery indicator that flashes when low battery



Features rugged carry handle and D-rings for hanging



| WHITE | HIGH | MEDIUM | LOW |
|---|---|---|---|
| LUMENS | 200 | 100 | 50 |
| RUN TIME | 7 hrs | 15.5 hrs | 37 hrs |

| SOS | HIGH | LOW |
|---|---|---|
| LUMENS | 0.7 | 0.7 |
| RUN TIME | 192 hrs | 288 hrs |

| Description | Item # |
|---|---|
| Siege AA - Coyote | 44941 |
| Siege AA - Yellow with Magnetic Base | 44943 |

| Size and Weight | Battery |
|---|---|
| 5.44" (13.82 cm); 8.8 oz (249.47g) // 9.1 oz (257.98g) with Magnetic Base | (3) AA alkaline batteries |

## SIEGE ACCESSORIES

| DESCRIPTION | ITEM # | SUPER SIEGE | THE SIEGE | SIEGE AA |
|---|---|---|---|---|
| Glare Guard™ | 44950 | √ | √ | |
| Magnetic Accessory Base - Coyote | 44942 | | | √ |
| Magnetic Accessory Base - Black | 44951 | √ | | |
| Magnetic Accessory Base - Black | 44952 | | √ | |
| 120V AC Charge Cord | 44909 | √ | | |


44950


44942


44951


44952


44909

# NEW WITH UPGRADED LUMENS AND CANDELA...

## PORTABLE SCENE LIGHT

**IP67**

Portable and collapsible flood light with extreme brightness

- 90° swivel neck shines light to out-of-the-way places
- Extends to full height within seconds
- Designed to adapt to tight space and rugged enough to withstand rough terrain

|  | HIGH | MEDIUM | LOW |
|---|---|---|---|
| **LUMENS** | 10,000 | 5,300 | 2,000 |
| **CANDELA** | 95,000 | 49,500 | 22,450 |
| **DISTANCE** | 616m | 445m | 300m |
| **RUN TIME** | 2 hrs | 4 hrs | 12 hrs |

**10 000 LUMENS**

| Description | Item # |
|---|---|
| Portable Scene Light - 120V AC/12V DC - Yellow | 45670 |
| Portable Scene Light EXT - 120V AC/12V DC - Yellow | 45680 |

| Size and Weight | Battery |
|---|---|
| 22.5" (57.2 cm); 25.8 lbs (11.7kg) // EXT: 25.5" (64.8 cm); 26.3 lbs (11.9kg) | Zero-maintenance, sealed lead acid; Can also be powered by 12V DC power cord |

Portable Scene Light: pole extends to 72" (182.88 cm)
Portable Scene Light EXT: pole extends to 84" (213.36 cm)

# PORTABLE SCENE LIGHT II

**IPX7**

Cordless, compact scene light enhances safety at your work site by eliminating trip hazards

- 360° rotating head directs the light where you need it; stackable for "light tower" capability
- 18 LEDs provide 10,000 lumens to light up an entire scene
- Hooked feet for hanging over doors, guard rails, fences, etc.

**10 000 LUMENS**

|  | 100% | 80% | 60% | 40% | 20% |
|---|---|---|---|---|---|
| LUMENS | 10,000 | 8,300 | 6,300 | 4,500 | 2,300 |
| RUN TIME | 2 hrs | 2.75 hrs | 3.75 hrs | 5.75 hrs | 11 hrs |

| Description | Item # |
|---|---|
| Portable Scene Light II - 120V/12V DC - Red | 46000 |

| Size and Weight | Battery |
|---|---|
| 16" (40.6 cm); 15.56 lbs (7.06kg) | Lithium-ion |

# FIRE VULCAN® LED

**IPX7**

Lightweight lantern featuring two ultra-bright blue taillights

- High candela light
- Waterproof and floats
- Programmable light function that lets you control the order in which the modes come on

|  | HIGH | LOW |
|---|---|---|
| LUMENS | 180 | 80 |
| CANDELA | 100,000 | 45,000 |
| RUN TIME | 5 hrs | 10 hrs |

| Description | Item # |
|---|---|
| Fire Vulcan LED - 120V AC/12V DC - Includes quick release shoulder strap - Orange | 44450 |
| Fire Vulcan LED - 120V AC/12V DC - Includes Berry strap & mounting rack - Orange | 44460 |
| Fire Vulcan LED - Without Charger - Includes quick release shoulder strap - Orange | 44454 |

| Size and Weight | Battery |
|---|---|
| 7.5" (19.05 cm); 1.8 lbs (839g) | Lithium-ion |

**SGS**

Class I, Div. 2, Grps. A, B, C, D; Class II, Div. 2, Grps. F, G; Class III, T-Code: T4

**NFPA**

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

## LANTERN ACCESSORIES

| Description | Item # | PORTABLE SCENE LIGHT | PORTABLE SCENE LIGHT EXT | PORTABLE SCENE LIGHT II | WAYPOINT 400 | WAYPOINT | FIRE VULCAN LED |
|---|---|---|---|---|---|---|---|
| Standard Charge Rack - Black | 44103 | | | | | | √ |
| 12V DC (Car Socket) Charge Cord | 22051 | | | | | | √ |
| 12V DC2 Charge Cord | 22050 | | | | | | √ |
| 12V DC Charge Cord (10') | 22056 | √ | | | | | |
| 120V AC Charge Cord | 22060 | | | | | | √ |
| 120V AC Charge Cord | 44909 | | | | √ | | |
| 12V AC Charge Cord | 44923 | | | | √ | | |
| 12V AC Charge Cord | 44903 | | | | | √ | |
| Power Supply | 22083 | √ | √ | √ | | | |
| 120V AC Charge Cord | 22074 | √ | √ | √ | | | |
| Battery (Sealed Lead Acid) | 45630 | √ | √ | | | | |
| Battery Pack (Lithium-ion) | 46005 | | | √ | | | |
| Battery (Lithium-ion) | 44610 | | | | | | √ |
| Quick Release Strap | 44050 | | | | | | √ |
| Heavy Duty Shoulder Strap w/ Carabiner Lock | 45677 | √ | √ | | | | |


44103


22051, 22056


22050


22060


44909


44923


44903


22083


22074


45630


44610


46005


44050


45677

# WAYPOINT® 400

Rechargeable spotlight for long range targeting

- Far reaching beam
- Integrated stand for hands-free lighting
- Rechargeable in 4 hours

|  | HIGH | MEDIUM | LOW |
|---|---|---|---|
| LUMENS | 1,400 | 600 | 38 |
| CANDELA | 400,000 | 165,000 | 10,000 |
| DISTANCE | 1,265m | 812m | 200m |
| RUN TIME | 3.25 hrs | 7.5 hrs | 84 hrs |

**1400 LUMENS**

**400,000 cd**

| Description | Item # | NSN/MCN |
|---|---|---|
| Waypoint 400 - 120V AC - Yellow | 44910 | -- |
| Waypoint 400 - 120V AC - Black | 44911 | -- |
| Waypoint 400 - 230/240V AC - Yellow | 44920 | -- |
| Waypoint 400 - 230/240V AC - Black | 44921 | 6230-01-686-3335 |
| Polymer Storage Mount | 44918 | -- |
| 120V AC Cord | 44909 | -- |
| Int'l AC Cord | 44919 | -- |
| 12V DC Power Cord | 44923 | -- |
| Red Filter | 44915 | -- |
| Green Filter | 44916 | -- |

| Size and Weight | Battery |
|---|---|
| 6.75" (17.14 cm); 1.52 lbs (691g) | Lithium-ion |

Polymer storage mount (included)

# WAYPOINT®

Alkaline powered spotlight for long range targeting

- Long distance, ultra-bright beam
- Integrated stand for hands-free lighting
- 12V DC power cord for unlimited run time

|  | HIGH | LOW |
|---|---|---|
| LUMENS | 550 | 40 |
| CANDELA | 100,000 | 7,900 |
| DISTANCE | 625m | 178m |
| RUN TIME | 10 hrs | 82 hrs |

12V DC Power Cord - Unlimited run time
Emergency Signal - Runs 82 hours

| Description | Item # |
|---|---|
| Waypoint - Includes 12V DC power cord - Yellow | 44900 |
| Waypoint - Includes 12V DC power cord - Black | 44902 |
| Waypoint - Includes 12V DC power cord - Clam - Yellow | 44904 |
| Waypoint - Includes 12V DC power cord - Clam - Black | 44905 |
| Polymer Storage Mount | 44908 |
| 12V DC Power Cord* | 44903 |
| Red Filter | 44924 |
| Green Filter | 44925 |

*12V DC power cord does not charge batteries

| Size and Weight | Battery |
|---|---|
| 6.75" (17.15 cm); 1.8 lbs (816g) | (4) "C" batteries (Not Included) |

Polymer storage mount (included)

## THE MOST TRUSTED RIGHT ANGLE LIGHT
# THIN, BRIGHT &
# EXTREMELY VERSATILE
# SURVIVOR

## SURVIVOR®

**IPX4**

**HAZ-LO DIVISION 1 LIGHTING**

**Extremely durable right angle flashlight**

- Four lighting modes including high, low, flash, and moonlight
- Push button switch for easy operation
- Unbreakable, scratch-resistant polycarbonate lens
- Features a D-ring for accurate light orientation and a spring loaded clip that grabs onto your gear

| Description | Orange | Yellow | Black | NSN/MCN |
|---|---|---|---|---|
| Survivor - 120V AC/12V DC | 90503 | 90513 | 90523 | 6230-01-389-5866 |
| Survivor - Without Charger | 90500 | 90510 | 90520 | -- |
| Survivor - Alkaline | 90540 | 90541 | 90545 | -- |

| Size and Weight | Battery |
|---|---|
| 7.06" (17.92 cm); Alkaline -13.7 oz (388g) // NiMH - 18 oz (510g) | Rechargeable NiMH battery pack; also accepts (4) AA Alkaline batteries |

|  | HIGH | LOW |
|---|---|---|
| **LUMENS** | 175 | 60 |
| **CANDELA** | 41,000 | 14,000 |
| **DISTANCE** | 405m | 237m |
| **RUN TIME** NiHM | 3.5 hrs | 13 hrs |
| **RUN TIME** Alkaline | 4 hrs | 15 hrs |
| Moonlight mode runs 20 days // Flash runs 8 hours | | |

**SGS**

Class I, II, Div. 1, Groups C, D, E, F, G;
Class I, Div. 2, Groups A, B, C, D;
Class III, T-Code: T4

**NFPA**

Flashlight meets 500°F requirements of NFPA 1971-8.6 (2018)

**NFPA**

Charger meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

**MSHA**

Permissible Flashlight, Approval No. 20-A150001-0 (Alkaline model)

# SURVIVOR® X

Right angle, lightweight flashlight that accepts both rechargeable lithium-ion battery pack or alkaline batteries

- Rubber dome push button switch is designed for easy operation
- Improved charger design
- Battery life indicator in switch: Green = full charge; Red = running low and Flashing Red = 15 minutes left on battery

| | HIGH | LOW |
|---|---|---|
| LUMENS | 250 | 60 |
| CANDELA | 50,000 | 14,000 |
| DISTANCE | 447m | 237m |
| RUN TIME Lithium | 3.75 hrs | 15 hrs |
| RUN TIME Alkaline | 5 hrs | 15 hrs |
| Flash runs 8 hours | | |

| Description | Item # |
|---|---|
| Survivor X - 120V/100V AC/12V DC - Yellow | 90962 |
| Survivor X - Alkaline - Yellow | 90960 |
| Survivor X - 120V/100V AC/12V DC - Orange | 90952 |
| Survivor X - Alkaline - Orange | 90950 |

| Size and Weight | Battery |
|---|---|
| 7.06" (17.92 cm); Alkaline: 12.8 oz (363g) // Lithium: 12.2 oz (346g) | Rechargeable lithium-ion battery pack or (3) AA alkaline |

**NFPA**
Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

**NFPA**
Flashlight meets 500°F requirements of NFPA 1971-8.6 (2018)

SGS
Class I, II, Div. 1, Groups A, B, C, D, E, F, G; Class III, T-Code: T3/T4

# SURVIVOR® X USB

USB rechargeable right-angle flashlight

- Rubber dome push button switch is designed for easy operation
- Improved charger design
- Battery life indicator in switch: Green = full charge; Red = running low and Flashing Red = 15 minutes left on battery

**NFPA**
Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

**NFPA**
Flashlight meets 500°F requirements of NFPA 1971-8.6 (2018)

SGS
Class I, II, Div. 2, Groups A, B, C, D, F, G; Class III, T-Code: T4

| | HIGH | LOW |
|---|---|---|
| LUMENS | 250 | 60 |
| CANDELA | 50,000 | 14,000 |
| DISTANCE | 447m | 237m |
| RUN TIME SL-B26 | 4 hrs | 15 hrs |
| RUN TIME Alkaline | 5 hrs | 15 hrs |
| Flash runs 8 hours | | |

| Description | Item # |
|---|---|
| Survivor X USB - Includes SL-B26 battery pack - Yellow | 90244 |
| Survivor X USB - Includes SL-B26 battery pack - Orange | 90044 |

Note: The Survivor® X is not compatible with legacy Survivor® chargers.

| Size and Weight | Battery |
|---|---|
| 7.06" (17.92 cm); Alkaline: 12.8 oz (363g) // SL-B26: 11.9 oz (337g) | Rechargeable SL-B26 battery pack or (3) AA alkaline |

Carry more light with less weight. Lightweight design because we understand that every ounce counts.

# SURVIVOR PIVOT® // SURVIVOR PIVOT® USB

**IP67**

## Multi-function, dual beam flashlight with 90° articulating head

- Spot beam uses a cool white, high-power LED for maximum distance illumination and flood beam is angled downward for area illumination
- Securely locks into charger with quick release latch for one-handed grab and go
- Translucent switch boot with integrated battery status indicator: Green = full charge; Red = running low and Flashing Red = 15 minutes left on battery

| | SPOT | | FLOOD | | COMBO | |
|---|---|---|---|---|---|---|
| | **HIGH** | **LOW** | **HIGH** | **LOW** | **HIGH** | **LOW** |
| **LUMENS** | 300 | 70 | 300 | 70 | 325 | 80 |
| **CANDELA** | 34,000 | 8,500 | 300 | 75 | 19,000 | 5,000 |
| **DISTANCE** | 369m | 184m | 35m | 17m | 276m | 141m |
| **RUN TIME** Lithium | 4.25 hrs | 16 hrs | 4.25 hrs | 16 hrs | 3.75 hrs | 13 hrs |
| **RUN TIME** Alkaline | 5.5 hrs | 15 hrs | 5.5 hrs | 15 hrs | 4.5 hrs | 12 hrs |

Survivor Pivot Safety Ratings:

**HAZ-LO DIVISION 1 LIGHTING**

**NFPA**
Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

**SGS** C US

Class I, II, Div. 1, Grps. A, B, C, D, E, F, G; Class III, T-Code: T3/T4

Spring-loaded clip

Optional magnet available for both models

Survivor Pivot USB Safety Ratings:

**NFPA**
Charger meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

**SGS** C US

Class I, II, Div. 2, Grps. A, B, C, D, F, G; Class III, T-Code: T4

| Description | Orange | Yellow |
|---|---|---|
| Survivor Pivot - 120V/100V AC/12V DC | 91802 | 91812 |
| Survivor Pivot - Alkaline - Includes battery carrier | 91800 | 91810 |
| Survivor Pivot Magnet - 120V/100V AC/12V DC | 91830 | 91831 |
| Survivor Pivot Magnet - Alkaline - Includes battery carrier | 91825 | 91826 |

| Description | Orange | Yellow |
|---|---|---|
| Survivor Pivot USB - Includes 22" (55.88 cm) USB cord and battery carrier | 91804 | 91814 |
| Survivor Pivot USB Magnet - Includes 22" (55.88 cm) USB cord and battery carrier | 91838 | 91839 |

## Size and Weight

7.93" (20.14 cm);
Lithium-ion: 16.2 oz (459g) // Alkaline: 16.7 oz (473g)
Lithium-ion: 17.6 oz (499g) // Alkaline: 18.1 oz (513g) W/MAGNET

USB Model: 7.93" (20.14 cm)
USB Model: SL-B26: 15.8 oz (448g) // Alkaline: 16.7 oz (473g)
USB Model with Magnet: SL-B26: 17.2 oz (488g) // Alkaline: 18.1 oz (513g)

## Battery

Rechargeable lithium-ion battery pack, SL-B26 or (3) AA alkaline

Note: The Survivor Pivot® is not compatible with legacy Survivor® chargers.

# SURVIVOR ACCESSORIES

| Description | Item # | SURVIVOR | SURVIVOR X | SURVIVOR X USB | SURVIVOR PIVOT | SURVIVOR PIVOT USB |
|---|---|---|---|---|---|---|
| 5 Unit 120V AC Bank Charger | 90910 | √ | √ | | √ | |
| 5 Unit 12V AC Bank Charger | 90912 | √ | √ | | √ | |
| NiMH Battery | 90339 | √ | | | | |
| Charge Holder | 90345 | √ | √ | | √ | |
| Lithium-ion Battery - C1D1 | 90341 | | √ | | √ | |
| Alkaline/SL-B26 Battery Carrier | 90342 | | √ | √ | √ | √ |
| 120V AC Charge Cord | 22060 | √ | √ | | √ | |
| 230V AC Charge Cord | 22061 | √ | √ | | √ | |
| 12V DC2 Charge Cord | 22050 | √ | √ | | √ | |
| 12V DC2 Charge Cord | 22051 | √ | √ | | √ | |
| SL-B26 Battery Pack - 1pk | 22101 | | | √ | | √ |
| SL-B26 Bank Charger 120V AC | 20224 | | √ | √ | | √ |
| SL-B26 Bank Charger 12V DC | 20223 | | √ | √ | | √ |
| Alkaline Battery Cartridge | 90542 | √ | | | | |

Notice: The Survivor X is not compatible with legacy Survivor chargers; however, the new charger WILL charge both Streamlight's Legacy Survivors as well as the new Survivor X.

90910, 90912

22061
NSN/MCN: 6130-01-538-4937

90542

20224, 20223

90345

22060
NSN/MCN: 5950-01-449-9029

22050

22051

90339

90341

90342

22101

# HEADLAMP SERIES

## PROTAC® 2.0 HEADLAMP

**IP64**

Ultra-powerful, rechargeable headlamp

- Powered by our SL-B50® rechargeable battery pack
- USB-C rechargeable, inside of the light; recharges in 6 hours
- TEN-TAP® Programmable

|  | HIGH | MEDIUM | LOW |
|---|---|---|---|
| LUMENS | 2,000 | 650 | 110 |
| CANDELA | 14,500 | 4,200 | 750 |
| DISTANCE | 241m | 130m | 55m |
| RUN TIME | 2.25 hrs | 4.5 hrs | 25 hrs |

| Description | Item # |
|---|---|
| ProTac 2.0 Headlamp - Includes (1) SL-B50 battery pack, USB-C cord, elastic and rubber straps - Black | 89001 |
| SL-B50 battery pack - 1pk | 22111 |
| SL-B50 battery pack - 2pk | 22112 |
| USB-C Cord | 22084 |

**2000 LUMENS**

| Size and Weight | Battery |
|---|---|
| 4.92" (12.5 cm); 10.48 oz (297.1g) | (1) SL-B50 battery pack |

## BANDIT® PRO

**IPX4**

### Lightweight, long lasting headlamp

- Snap-in clip adaptor attaches to a pocket, jacket or to the visor on a hat; adds additional downward adjustability
- USB rechargeable with battery life indicator; recharges in 3.5 hours
- Smooth and diffused light for up close tasks



|  | HIGH | LOW |
|---|---|---|
| **LUMENS** | 180 | 35 |
| **RUN TIME** | 4.5 hrs | 21 hrs |

Emergency flash - 180 lumens

| Description | Item # |
|---|---|
| Bandit Pro - Includes USB cord - Clam - Yellow | 61710 |
| Bandit Pro - Includes USB cord - Clam - Black | 61714 |

| Size and Weight | Battery |
|---|---|
| 2.7" (6.85 cm); 1.6 oz (45.4g) | Rechargeable lithium polymer |

## BANDIT®

**IPX4**

### Ultra-lightweight, low-profile headlamp

- Large button for easy actuation
- USB rechargeable battery
- Snap-in clip adaptor attaches to a pocket, jacket or to the visor on a hat; adds additional downward adjustability
- Delivers a wide even beam with minimum shadows, perfect for close-up work



| White LED | HIGH | LOW |
|---|---|---|
| **LUMENS** | 180 | 35 |
| **RUN TIME** | 2 hrs | 9.5 hrs |

Emergency flash - 180 lumens



| Green LED | HIGH | LOW |
|---|---|---|
| **LUMENS** | 135 | 25 |
| **RUN TIME** | 3 hrs | 13.5 hrs |

| Red LED | HIGH | LOW |
|---|---|---|
| **LUMENS** | 45 | 10 |
| **RUN TIME** | 2.5 hrs | 10 hrs |

| Description | Item # |
|---|---|
| Bandit - Includes USB cord - Clam - Yellow | 61700 |
| Bandit - Includes USB cord - Clam - Black | 61702 |
| Bandit - Includes USB cord - Clam - Coyote with Red LED | 61706 |
| Bandit - Includes USB cord - Clam - Coyote with Green LED | 61707 |
| 40" (101 cm) USB Cord | 22070 |

| Size and Weight | Battery |
|---|---|
| 2.7" (6.85 cm); 1.3 oz (36.8g) | Rechargeable lithium polymer |

## VANTAGE® 180 X USB

**IPX7**

Versatile multi-fuel right-angle flashlight

- Multi-use flashlight: helmet-mounted for hands-free use, attaches to turnout gear and can be used as a handheld
- Head articulates 180° to aim the beam where you need it
- Easily attaches to both traditional and modern style helmets with no tools necessary

|  | HIGH | LOW |
|---|---|---|
| LUMENS | 250 | 100 |
| CANDELA | 7,200 | 2,650 |
| DISTANCE | 170m | 103m |
| RUN TIME | 5 hrs | 15 hrs |

| Description | Item # |
|---|---|
| Vantage 180 X USB - Includes (1) SL-B26 battery pack and helmet bracket - Orange | 88911 |
| Vantage 180 X USB - Includes (1) SL-B26 battery pack and helmet bracket - Black | 88913 |
| Vantage 180 X - Includes (2) CR123A batteries and helmet bracket - Orange | 88901 |
| Vantage 180 X - Includes (2) CR123A batteries and helmet bracket - Black | 88903 |

| Size and Weight | Battery |
|---|---|
| 5.2" (13.2 cm); SL-B26: 5.9 oz (167g) // CR123A: 5.2 oz (156g) | (1) SL-B26 battery pack or (2) CR123A lithium |

**NFPA**
Flashlight meets 500°F requirements of
NFPA 1971-8.6 (2018)

## VANTAGE® II

**IPX7**

Compact, low-profile helmet light designed to easily attach above or below brim of fire helmets

- Shock-proof and virtually indestructible with safety feature - blue taillight LED so you can be seen from behind
- Large push-button switch for easy on/off, even with gloves
- Swivel clamp to optimize beam location

|  | HIGH | LOW |
|---|---|---|
| LUMENS | 350 | 135 |
| CANDELA | 3,500 | 1,700 |
| DISTANCE | 118m | 80m |
| RUN TIME | 2.25 hrs | 5 hrs |

| Description | Item # |
|---|---|
| Vantage II - Fire - Includes (1) CR123A lithium battery - Black | 69331 |
| Bracket Kit - Fire | 69334 |

| Size and Weight | Battery |
|---|---|
| 2.37" (6.02 cm); Industrial Mount: 2.97 oz. (84.2g) // Fire Mount: 3.65 oz (103.5g) | (1) CR123A lithium |

**NFPA**
Flashlight meets 500°F requirements of
NFPA 1971-8.6 (2018)

# VANTAGE®

Compact, powerful, shock-proof, and virtually indestructible helmet light

- Attaches easily to helmets and hard hat and rotates 360°
- Fits both taditional and modern helmets
- Features a bright taillight LED to be seen from behind even in heavy fog

| LUMENS | 115 |
|---|---|
| CANDELA | 7,000 |
| DISTANCE | 167m |
| RUN TIME | 6 hrs |

**NFPA**
Flashlight meets 500°F requirements
of NFPA 1971-8.6 (2018)

| Description | Item # | NSN/MCN |
|---|---|---|
| Vantage - Includes (2) CR123A lithium batteries - Black | 69331 | 6230-01-616-8786 |

| Size and Weight | Battery |
|---|---|
| 3.26" (8.28 cm); 5.14 oz (145.7g) | (2) CR123A lithium |

470nm ultra-bright
taillight LED

# MICROSTREAM® USB

**IPX4**

## Rechargeable pocket light

- Discreet light that fits in your pocket
- Clip it to your pocket or hat for hands-free use
- USB rechargeable – metal sleeve protects charge port; slide sleeve forward to reveal charge port

|  | HIGH | LOW |
|---|---|---|
| LUMENS | 250 | 50 |
| CANDELA | 1,150 | 250 |
| DISTANCE | 68m | 31m |
| RUN TIME | 1.5 hrs | 3.5 hrs |

| Description | Item # |
|---|---|
| MicroStream USB - Includes USB cord and lanyard - Clam - Black | 66601 |
| MicroStream USB - Includes USB cord and lanyard - Box - Black | 66604 |
| MicroStream USB - Includes USB cord and lanyard - Clam - Coyote | 66608 |
| MicroStream USB - Includes USB cord and lanyard - Box - Coyote | 66609 |

| Size and Weight | Battery |
|---|---|
| 3.87" (9.83 cm); 1.2 oz (34.1g) | Lithium-ion |

---

# MICROSTREAM®

**IPX4**

## Ultra-compact personal light

- Clip it to your hat or pocket
- Alkaline battery powered

| LUMENS | 45 |
|---|---|
| CANDELA | 420 |
| DISTANCE | 41m |
| RUN TIME | 2.25 hrs |

| Description | Item # | NSN/MCN |
|---|---|---|
| MicroStream - Includes (1) AAA alkaline battery - Black | 66318 | 6230-01-583-9046 |

| Size and Weight | Battery |
|---|---|
| 3.6" (9.15 cm); 1.1 oz (31.2g) | (1) AAA alkaline battery |

---

# MACROSTREAM® USB

**IPX4**

## High-power, rechargeable flashlight

- Lithium-ion battery charges in 4 hours
- Durable aluminium construction
- Pocket clip attaches to visor

|  | HIGH | LOW |
|---|---|---|
| LUMENS | 500 | 50 |
| CANDELA | 2,000 | 220 |
| DISTANCE | 90m | 30m |
| RUN TIME | 2 hrs | 8 hrs |

| Description | Item # |
|---|---|
| MacroStream USB - Includes USB cord and lanyard - Black | 66320 |

| Size and Weight | Battery |
|---|---|
| 4.5" (11.43 cm); 2.2 oz (62.4g) | Lithium-ion |

## MEGASTREAM® USB

**IPX7**

Rechargeable flashlight combining intense brightness with long-distance beam reach and long run time

- The hot-swappable battery capability lets you keep going—charge one battery while using another, so you always have a fully charged backup
- Sliding sleeve protects the USB port; recharges in 5 hours
- Powered by a SL-B34® rechargeable battery

**1800 LUMENS**

|  | HIGH | MEDIUM | LOW |
|---|---|---|---|
| LUMENS | 1,800 | 500 | 150 |
| CANDELA | 26,000 | 7,200 | 2,100 |
| DISTANCE | 322m | 170m | 92m |
| RUN TIME | 2 hrs | 3.5 hrs | 13 hrs |

| Description | Item # |
|---|---|
| MegaStream USB - Includes USB-C cord, lanyard and SL-B34 battery pack - Black | 66210 |

| Size and Weight | Battery |
|---|---|
| 5.3" (13.4 cm); 5.4 oz (152g) | (1) SL-B34 battery pack |

## STREAMLIGHT® JR. LED

**IPX4**

Handheld AA battery-sized flashlight

- Doesn't take up a lot of space in the toolbox
- Push-button switch for momentary or constant on

| LUMENS | 225 |
|---|---|
| CANDELA | 2,700 |
| DISTANCE | 104m |
| RUN TIME Alkaline | 6 hrs |
| RUN TIME Lithium | 10 hrs |

| Description | Item # |
|---|---|
| Streamlight Jr. LED - Includes (2) AA alkaline batteries and nylon holster - Black | 71500 |
| Magnetic Clip Holder | 71510 |
| Nylon Holster | 71503 |
| Rubber Helmet Strap | 99075 |

| Size and Weight | Battery |
|---|---|
| 6.5" (16.51 cm); 4.1 oz (117g) | (2) AA alkaline or lithium |

## STYLUS PRO®

**IPX4**

High performance penlight

- Fits easily in your pocket
- Great flashlight for close up, under the hood inspections

| LUMENS | 100 |
|---|---|
| CANDELA | 950 |
| DISTANCE | 62m |
| RUN TIME | 8 hrs |

| Description | Item # |
|---|---|
| Stylus Pro - Black with White LED - Clam - Black | 66118 |

| Size and Weight | Battery |
|---|---|
| 5.3" (13.4 cm); 1.64 oz (46.9g) | (2) AAA alkaline batteries |

## STYLUS®

**IPX4**

Ultra-slim penlight with a long battery life

- Multi-use penlight
- Removable pocket clip

| LED Color | WHITE |
|---|---|
| LUMENS | 11 |
| CANDELA | 140 |
| DISTANCE | 24m |
| RUN TIME | 24 hrs |

| Description | Item # | COO | TAA |
|---|---|---|---|
| Stylus - Black - White LED | 65018 | US | YES |
| AAAA Alkaline batteries - 6pk | 65030 | -- | -- |
| Glare Guard | 65031 | -- | -- |
| Nylon holster | 65905 | -- | -- |
| Lanyard with push-button slide | 72024 | -- | -- |

| Size and Weight | Battery |
|---|---|
| 6.21" (15.17 cm); 1.1 oz (31g) | (3) AAAA alkaline batteries |

## STYLUS PRO® USB // STYLUS PRO® USB UV

**IPX4**

Rechargeable penlight, ideal for illuminating hard-to-reach spaces

- Recharges in 2.5 hours
- Powers on in "low" mode; press twice for high mode
- UV Model features a purple sleeve for easy identification

| Description | Item # |
|---|---|
| Stylus Pro USB - 120V AC with holster - Black | 66133 |
| Stylus Pro USB - Includes USB cord and holster - Black | 66134 |
| Stylus Pro USB UV - 120V AC with holster - Black | 66148 |
| Stylus Pro USB UV - Includes USB cord and holster - Black | 66149 |
| Nylon holster | 66029 |
| USB cord | 22070 |
| 120V AC USB cord | 22071 |

| WHITE LED | HIGH | LOW |
|---|---|---|
| LUMENS | 350 | 90 |
| CANDELA | 2,950 | 840 |
| DISTANCE | 109m | 58m |
| RUN TIME | 1.5 hrs | 3.5 hrs |

| 400NM UV LED | |
|---|---|
| OUTPUT | 250mW |
| RUN TIME | 2.5 hrs |

| Size and Weight | Battery |
|---|---|
| 5.95" (15.1 cm); 1.8 oz (51g) | Lithium-ion |

## NEW

# NANO LIGHT® II

**IPX7**

Ultra-compact key chain light easily attaches to key rings, zippers, etc.

- Snap hook easily attaches to key rings, zippers, etc.
- Rotating On/Off head switch
- Powered by one easy-to-find AAAA alkaline battery

| LUMENS | 20 |
|---|---|
| CANDELA | 120 |
| DISTANCE | 22m |
| RUN TIME | 1 hr |

| Description | Item # |
|---|---|
| Nano Light II - Includes (1) AAAA alkaline battery - Black | 73020 |

| Size and Weight | Battery |
|---|---|
| 2.2" (5.7 cm); 0.6 oz (18g) | (1) AAAA alkaline |

# POCKET MATE®

**IPX4**

Small but powerful hands-free light

- Ultra-compact design makes it easy to always carry it with you
- Multi-function push-button switch with charge indicator
- Recharges in 4 hours

| | HIGH | LOW |
|---|---|---|
| LUMENS | 325 | 45 |
| CANDELA | 1,450 | 200 |
| DISTANCE | 76m | 28m |
| RUN TIME | 20 min | 1 hr |

| Description | Item # |
|---|---|
| Pocket Mate - Includes Micro-USB cord - Silver | 73300 |
| Pocket Mate - Includes Micro-USB cord - Red | 73301 |
| Pocket Mate - Includes Micro-USB cord - Blue | 73302 |
| Pocket Mate - Includes Micro-USB cord - Pink | 73303 |

| Size and Weight | Battery |
|---|---|
| 2" (5.1 cm); 0.5 oz (14.2g) | Lithium Polymer |

# CLIPMATE® USB

**IPX4**

Multi-function clip light for hands-free use

- Features a white LED and a 620-630 nm red LED
- Built-in USB charge tab
- Recharges by plugging into USB port or optional AC wall adapter

| White LED | HIGH | LOW | Red LED | HIGH | LOW |
|---|---|---|---|---|---|
| LUMENS | 70 | 10 | LUMENS | 0.5 | 0.2 |
| CANDELA | 500 | 50 | CANDELA | 9 | 3 |
| DISTANCE | 44m | 14m | DISTANCE | 6m | 3m |
| RUN TIME | 3.5 hrs | 24 hrs | RUN TIME | 16 hrs | 65 hrs |

| Description | Item # |
|---|---|
| ClipMate USB | 61125 |
| Clipmate USB - 120V AC | 61126 |
| 120V AC Wall Adapter | 22058 |
| Clipmate USB Battery | 61128 |

| Size and Weight | Battery |
|---|---|
| 3.2" (8.13 cm); 1.9 oz (53.86g) | Lithium Polymer Cell |

# STREAMLIGHT

## BRILLIANT THINKING

**Streamlight, Inc.**
**30 Eagleville Road**
**Eagleville, PA U.S.A. 19403-3996**

**streamlight.com // streamlightgear.com**
**(800) 523-7488 Toll-Free**
**(800) 220-7007 Fax**
**(610) 631-0600**
**(610) 631-0712 Fax**

DISTRIBUTED BY: